

#407 Wide Mouth Top Beam Clamp


Finish: Bare Metal, Zinc Plated

Material: Ductile Iron* c/w hardened steel cup point set screw

Approvals: U.L. - U.L.C. listed 3/8 and 1/2 (1/2 for 4" IPS max).
FM approved for 3/8" only.
 Complies with Manufacturers' Standardization Society
 MSS SP-58 and SP-69 (Type 19)



Recommended: Recommended for use under roof installations with bar joist type construction, or for attachment to top flange of structural shapes.

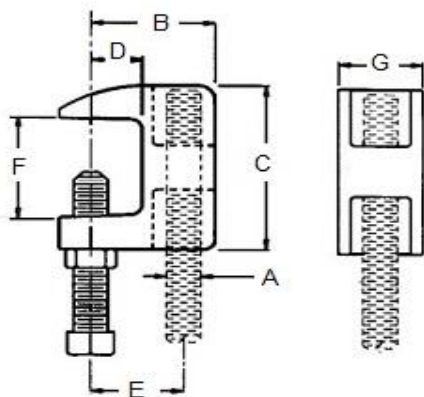

Maximum recommended set screw torque values per
 MSS SP-69.
 Set Screw Size 3/8"-16
 Foot-Lbs 5
 Nm 7

(CARE SHOULD BE TAKEN NOT TO OVER TIGHTEN SET SCREW)

ROD SIZE A	SPECIFICATION DATA						MAX. PIPE SIZE	RECOM. MAX. LOAD (LBS)	APPR'X WT. PER 100 (LBS)	PC'S PER PKG.
	B	C	D	E	F	G				
3/8	1 3/8	2	1/2	1	1 1/4	7/8	4	610	39	100
1/2	1 3/8	2	1/2	1	1 1/4	7/8	4	1130 *	40	100
5/8	1 7/8	2 3/8	5/8	1 3/8	1 1/4	1 1/4	5	1130	66	50
3/4	1 7/8	2 3/8	5/8	1 3/8	1 1/4	1 1/4	6	1130	83	50

TAYLOR walraven

*750 if inverted

QWI 4.3.1 Issue Date Jul/21 Rev.16

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorassociates.com

For more information, please contact Customer Service at 1-800-263-8652