


#40 Split Ring Clamp

Finishes Zinc Plated, Rubber Lined

Materials Carbon Steel / EPDM Rubber

Approvals MSS SP-58 (Type 12)

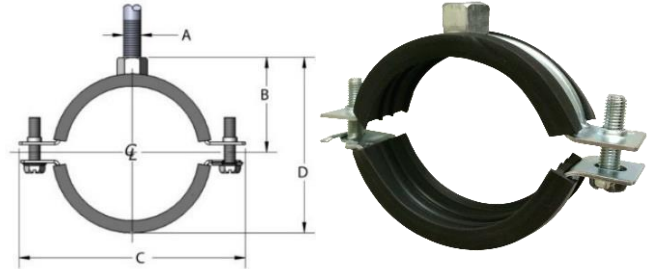

Recommended Recommended for for the suspension of insulated and non-insulated pipe lines.

Notes UV resistant rubber lining provides for noise reduction and vibration control.

Swing gate style clamp for quick and easy installation (no loose hardware).

Temperature range use -20F to +230F

Iron Pipe Size	Copper Tube Size	Metric Size (mm)	SPECIFICATION DATA				LBS Each	Rec. Max Load (Lbs)
			A	B	C	D		
1/4	3/8	11-14	3/8 - 16	7/8	2 3/16	1 3/8	.11	180
3/8	1/2	15-18	3/8 - 16	15/16	2 3/8	1 1/2	.12	180
-	5/8	19	3/8 - 16	1	2 3/8	1 5/8	.12	180
1/2	3/4	20-23	3/8 - 16	1 1/16	2 9/16	1 3/4	.14	180
3/4	1	25-29	3/8 - 16	1 3/16	2 3/4	2	.15	180
1	1 1/4	30-35	3/8 - 16	1 1/4	3 1/8	2 1/4	.17	180
1 1/4	1 1/2	40-45	3/8 - 16	1 7/16	3 1/2	2 1/2	.19	180
1 1/2	-	46-51	3/8 - 16	1 9/16	3 3/4	2 3/4	.2	180
-	2	53-59	3/8 - 16	1 11/16	3 15/16	3	.26	180
2	-	59-64	3/8 - 16	1 3/4	4 1/8	3 1/4	.27	180
-	2 1/2	67-71	3/8 - 16	1 15/16	4 7/16	3 1/2	.29	300
2 1/2	-	72-78	3/8 - 16	2 1/16	4 3/4	3 3/4	.36	300
-	3	80-84	3/8 - 16	2 1/4	5	4 1/16	.38	300
3	-	86-92	3/8 - 16	2 7/16	5 7/16	4 7/16	.41	300
-	3 1/2	95-99	3/8 - 16	2 1/2	5 9/16	4 9/16	.41	300
3 1/2	4	100-107	3/8 - 16	2 3/4	6 1/8	5 1/16	.67	300
4	-	108-116	3/8 - 16	2 15/16	6 7/16	5 7/16	.70	300

QWI 4.3.1 Issue Date Dec/18 Rev.1

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorpipesupports.ca

For more information, please contact Customer Service at 1-800-263-8652