

#22Z Adjustable Clevis Hanger Light Duty


Finishes Zinc Plated

Materials Carbon Steel

Approvals Complies with MSS SP-58 and SP-69 (Type 1).

Recommended Recommended for the suspension of non-insulated stationary pipe lines allowing for vertical adjustment.

Maximum temperatures: Bare Metal
650°F Galvanized & Epoxy 450°F

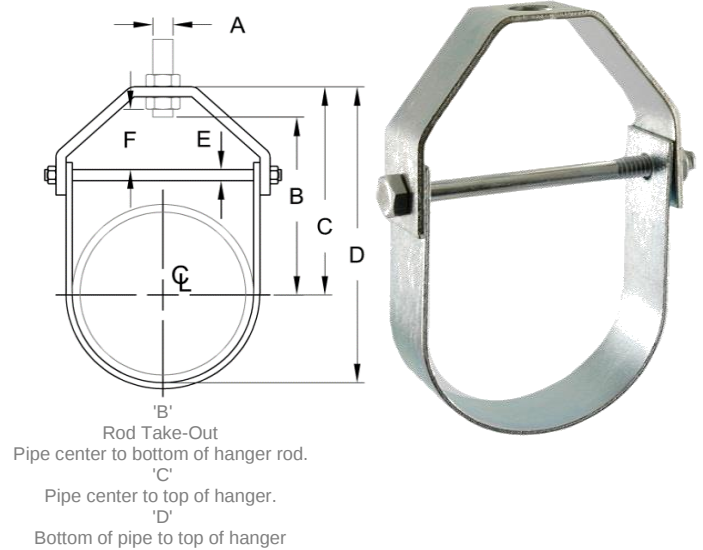

IRON PIPE SIZE	SPECIFICATION DATA						REC. MAX LOAD (LBS)	APP'X WT. PER 100 (LBS)	PC'S PER PKG.
	A	B	C	D	E	F			
1/2	3/8	1 1/8	1 3/4	2 1/8	1/4	1/2	250	12	100
3/4	3/8	1 9/16	1 13/16	2 5/16	1/4	1/2	250	12	100
1	3/8	1 3/4	2 1/8	2 3/4	1/4	3/4	250	12	100
1 1/4	3/8	2 1/32	2 1/2	3 1/4	1/4	15/16	250	18	100
1 1/2	3/8	2 1/4	2 13/16	3 13/16	1/4	1 1/8	250	24	100
2	3/8	2 11/16	3 5/16	4 1/2	1/4	1 1/4	250	26	100
2 1/2	1/2	3 7/16	4 1/2	5 5/16	1/4	2 1/16	350	58	50
3	1/2	3 7/8	4 13/16	6 9/16	5/16	1 7/8	350	66	25
3 1/2	1/2	4 5/8	5 15/16	7 7/8	5/16	2 5/8	350	82	25
4	1/2	4 7/8	6 1/16	8 5/16	3/8	2 3/8	400	94	25

QWI 4.3.1 Issue Date Dec/18 Rev.12

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorpipesupports.ca

For more information, please contact Customer Service at 1-800-263-8652