




1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.toplineplumbing.com](http://www.toplineplumbing.com)

**PROJECT NAME:** \_\_\_\_\_  
**LOCATION:** \_\_\_\_\_  
**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_  
**TOP-LINE PART NO.** \_\_\_\_\_

TOP-LINE® Low Lead 4" OC Wall or Back  
Splash Mount Faucet with Swivel Gooseneck  
Spout and Quarter Turn Ceramic Valves

## TLL15-41xx-SE1Z Series

TLL15-4100-SE1Z 3" Gooseneck Spout  
TLL15-4101-SE1Z 8" Gooseneck Spout  
TLL15-4102-SE1Z 6" Gooseneck Spout

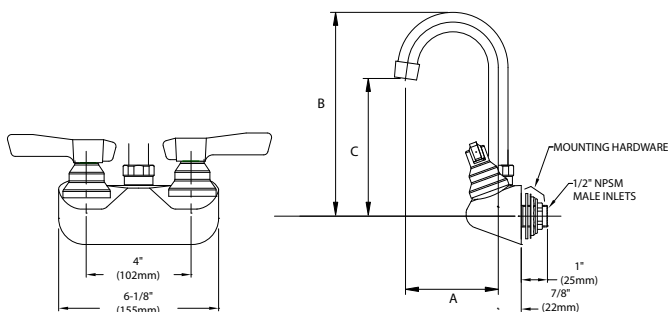

Dimensions shown in inches (mm) are for reference only  
and are subject to change.

1-1/8" (29mm) holes for wall are recommended  
to accommodate 1/2" supply nipples  
1/2" NPSM Male Inlet  
Operating Temperature: 40 - 180°F (5 - 83°C)  
Operating Pressure: 15 - 125psi

Approximate shipping weight - 3 lbs  
Warranty - 1 year

All metal construction is specification and commercial quality.

### Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel swivel gooseneck spout design
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

### SPECIFICATIONS:

Low Lead 4" OC Wall or Back Splash Mount Faucet to be TOP-LINE  
TLL15-410x-SE1 Series in the following configuration:

\_\_\_\_ TLL15-4100-SE1Z 3" Gooseneck Spout  
\_\_\_\_ TLL15-4101-SE1Z 8" Gooseneck Spout  
\_\_\_\_ TLL15-4102-SE1Z 6" Gooseneck Spout

Faucet body to be constructed of polished chrome plated brass. Escutcheon to be polished chrome plated brass. Valves to be quarter turn ceramic type. Handles to be lever style. Supply inlets to be 4" (102mm) on center. Spout to be stainless steel swivel gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard aerator.

Model No.	A	B	C
TLL15-4100-SE1Z	3" (76mm)	7-1/2" (191mm)	6" (152mm)
TLL15-4101-SE1Z	8" (203mm)	11" (279mm)	9-1/8" (232mm)
TLL15-4102-SE1Z	6" (152mm)	8-1/2" (216mm)	5-1/2" (140mm)

