




Residential/Commercial Combustion Analyzer w/ Pressure

KANE358

Residential/Commercial Combustion Analyzer w/ Pressure

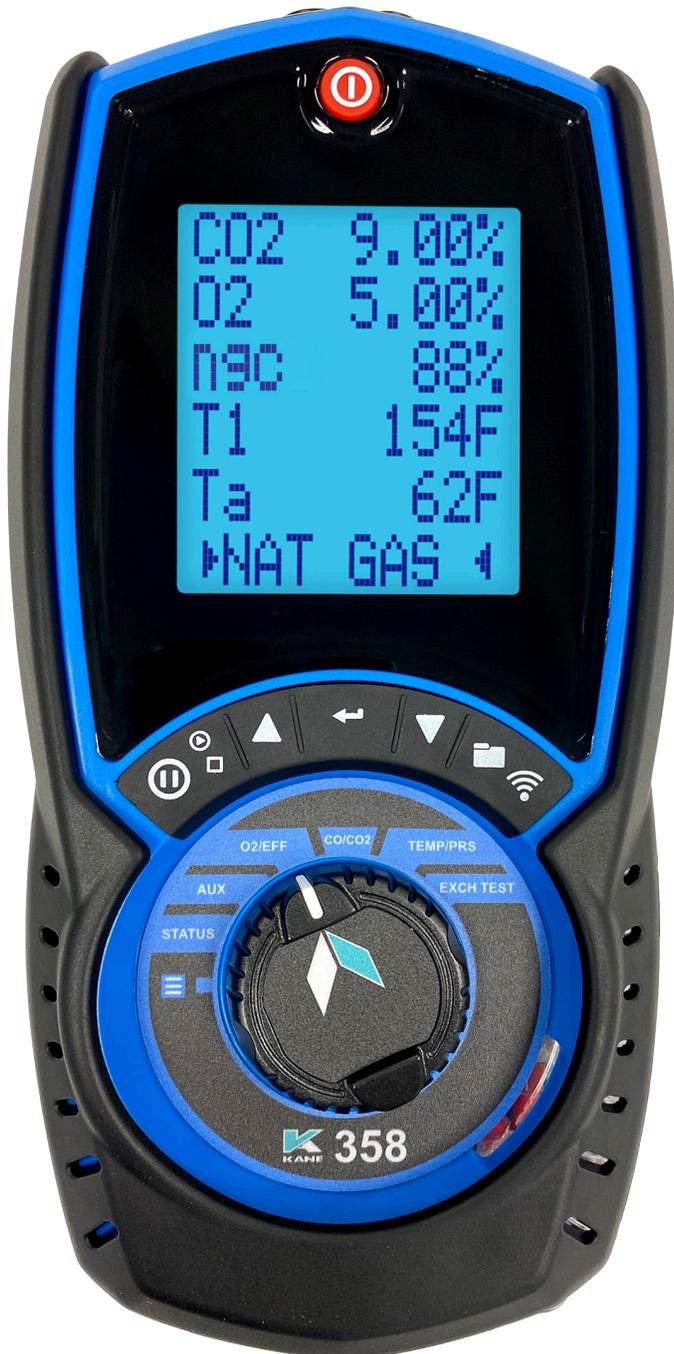

Functions

- Measures: CO, CO₂, Differential Pressure, Flue and Inlet Temperature
- Calculates: Differential Temperature, Efficiency (Net, Gross), Excess Air

Features

- Up to 6-Year warranty with annual recertification
- Differential Pressure
- 3 types of sensor protection:
- Over-range protection pump
- NO_x filtered CO sensor
- Low Flow Detection
- Large 6-line backlit display
- Temperature Differential w/ K-Type probe inputs
- Protective water trap

Includes

- Rechargeable batteries 3 (AA)
- Probe (CP2)
- USB Charging cable (WIR00067)
- Particle Filter (spare) 17631)
- Tubing w/ connector (11000)
- K-Type Thermocouples, 2 (ATT29)
- Quick Start Guide
- Carry case (AC509)



Residential/Commercial Combustion Analyzer w/ Pressure

KANE358

Specifications

Temperature Measurement

Parameter	Range	Resolution	Accuracy
Flue Temperature	32° to 1112°F (0° to 600°)	0.1°F (0.1°C)	±1.0°F (0.5°C)
Inlet Temperature (Internal Sensor)	32° to 112°F (0° to -50°)	0.1°F (0.1°C)	±2°F (1°C)
Inlet Temperature (External Sensor)	32° to 1112°F (0° to 600°)	0.1°F (0.1°C)	±1.0°F (0.5°C)

Flue Gas Measurement

Parameter	Range	Resolution	Accuracy
Carbon Monoxide	0 to 2000 ppm	1 ppm	±3 ppm or ±5% rdg (whichever is greater)
(Optional H2 Compensated)	2000 to 10000 ppm	1 ppm	±10% rdg
Carbon Dioxide	0 to 20%	0.1%	±0.3% volume

Calculations

Parameter	Range	Resolution	Accuracy
Oxygen	0 to 21%	0.1%	±0.3% volume
Efficiency (Net or Gross)	0 to 99.9%	0.1%	±1% rdg
Excess Air	0 to 119.9%	0.1%	±0.2% rdg

Pre- Programmed Fuels	Natural Gas, Propane, LPG, Light Oil, Heavy Oil, Bio Oil, Pellets
-----------------------	---

Battery Life	>8 hours (continuous with pump on)
--------------	------------------------------------

Certification	The C161 is TUV-tested and certified to EN 50379, Parts 1-3 in accordance to 1st German Federal Emission Control Ordinance (BimSchV)
---------------	--

Operating Conditions

Temperature	32° to 113°F (0° to 45°C)
Humidity	15% to 90% R.H.

Storage Temperature	0° to 113°F (-18° to 50°C)
Power Supply	Rechargeable Batteries, USB Charging

Dimensions

Dimensions	8.54" x 4.18" x 1.86"
Weight	1 lb., 5.1 oz.

KANE358



0 53533 90012 5

Made in
UNITED KINGDOM