



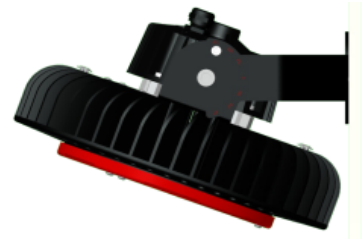

UT-HEM

Part #	
Project	
Type	

HIGH-EFFICIENCY MIXED-USE LED HIGHBAY

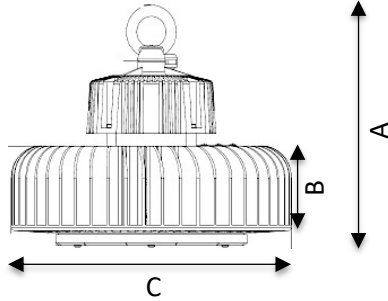

Input Watts	150W	240W
Dimensions	A:9" / B: 3-11/16" / C:11"	A:8" / B:2-1/2" / C:12-5/8"
Lumen Output (± 10%)	21,000	34,800

TECHNICAL DESIGN SPECIFICATION

Construction/Finish	Black Powder-Coated Die Cast Aluminum
Operating Voltage	120-277V or 240-480V
Dimming	0-10V available
Beam Angle	120°
CCT	5000K Custom
Labels	cUL DLC IP65
Warranty	5 Year Warranty
Additional Key Specifications	50,000 hrs Temperature Rating: -40°C to +40°C
Accessories	Microwave Motion Sensor Daylight Harvesting Sensor Flood Light Bracket Adjustable Wall Mount Bracket Polycarbonate (PC) Lens Aluminum (AL) Lens

ORDERING INFORMATION

Part #	Size	Trim Option	Voltage
UT-HEM			
UT-HEM	150W 240W	50K CUSTOM	277: 120-277V 347: 240-480V