


# SOLE Series

## DL-DIRECT 4"



Part #	UT-DL-DIRECT-4-R-WH-50K
Project	
Type	

Our DL-DIRECT LED Switchable Lights feature an ultra slim design, perfect for tight area install in ceilings and closets. Minimum rough-in work is required as they can easily clip into 1/2" drywall. They are dimmable, IC-rated, available in three trim colors, and can be switched from warm white to natural white. Our side diffusion optic system reduces glare and hot spotting. Their compact size makes them the ideal product for both residential and commercial applications.

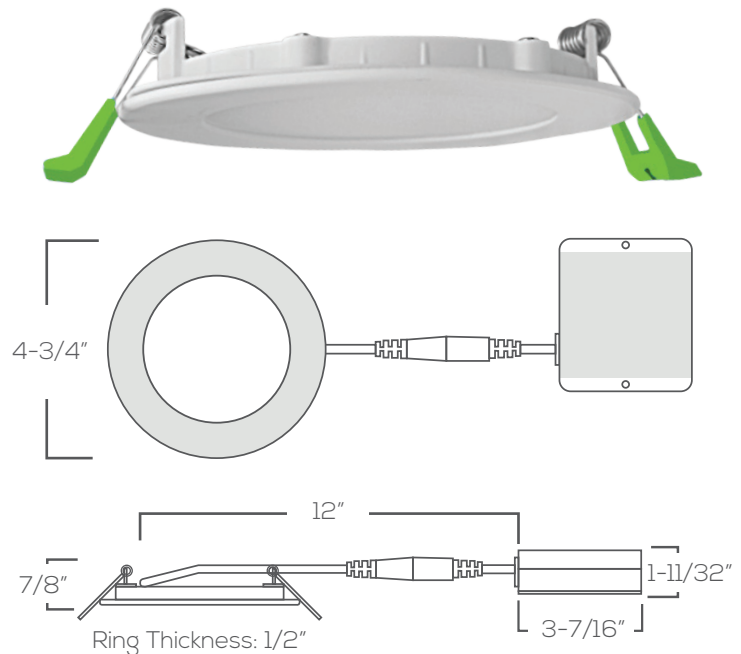

## Product Specifications

Input Voltage	120V
Power Consumption	9W
Initial Lumens	620
Beam Angle	120° Flood
Dimming (Dimmer Dependent)	Triac to 5%
Construction	Aluminum Housing
Weight	0.32 KG
Max Depth (Trim/Driver)	1-1/2 inch
Cutout Size	4-1/4 inch

Selectable CCT	5000K
CRI	+82
Rating	Damp Location
Certification	cETL to CSA Standards
Warranty	5 Years
Temperature Rating	-30°C to +40°C
Key Specifications	Hardwire via Provided Junction Box Knockout (hole size: 1/2" NPT)
Accessories	Rough-in Plates   Vapor Barrier

## Ordering Information

Part #
UT-DL-DIRECT-4-R-WH-50K

## Accessories

Rough-In Plate	Vapor Barrier
<input type="checkbox"/> UT-RIP-4	<input type="checkbox"/> UT-VB-40

For further information please contact us

www.utechnology.ca | (403) 800-3044

