

RECESSED DOWNLIGHTS

Accessories for Quick and Simple Installation



ROUGH-IN PLATE


Galvanized steel rough-in plates designed for simple and precise placement of U Technology recessed LED downlights - for easy retrofits and effortless new construction installation.

	UT-RIP-3	UT-RIP-32	UT-RIP-33	UT-RIP-35	UT-RIP-33-35	UT-RIP-4	UT-RIP-6
Hole Diameter	70 mm	78.5 mm	90 mm	95 mm	90mm / 95mm	112 mm	159 mm
Length	335 mm	335 mm	336 mm	320 mm	330 mm	420 mm	420 mm
Width	165 mm	165 mm	165 mm	194 mm	165 mm	197 mm	197 mm
Compatible Products	DL-DIRG-3	DL-SHIFT	LGG Series	LGD Series	LGG Series LGD Series	DL-DOME-4 DL-DLG-4 DL-DIRECT-4	DL-DOME-6 DL-DLG-6 DL-DIRECT-6
Additional Features	Alignment Notches	Alignment Notches	Alignment Notches	24" Extendable Arm	2 Sizes in 1	Alignment Notches, Ruler	Alignment Notches, Ruler

	UT-VB-40	UT-VB-60
Hole Diameter	110 mm	157 mm
Length	440 mm	360 mm
Width	190 mm	230 mm
Height	145 mm	100 mm
Compatible Products	All up to UT-RIP-4	UT-RIP-6
Additional Features	Virgin polyethylene for higher performance and consistency	

VAPOR BARRIER

Designed to make installation of downlights with a sealed enclosure easier and quicker when combined with U Technology Rough-in Plate.

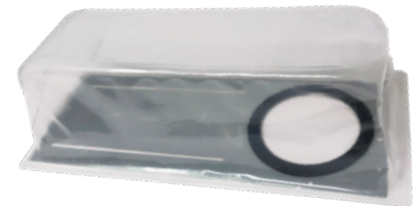

U Technology Vapor Barriers are specified to meet the Building Code for both permeability and temperature rating as outlined by the global ASTM standards and certified by the largest labs in the world: SGS, Switzerland. Must be stored and installed above 15°C.

