



Project
Type
Date
Cat #

Application Features

Premium-grade, T5 fluorescent strip luminaire. For use with indoor applications, where compact design, high-performance and ease of installation are required (such as display cabinets).

Specifications

Optical System

Standard reflectors are solid and are coated with a durable, high-reflectance white finish. Optional reflectors are available with 1/2 reflector or asymmetric cutoffs, in white and specular aluminum with a minimum reflectance of 95%.

Mounting

Mounting holes are provided.

Construction

Die and brake-formed, code gauge, pre-painted white steel. One-piece folded construction. This luminaire is suitable for row-mounting.

Finish

Pre-painted, high-reflectance white housing.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Available with 1, 2 or 3 lamps (T5 configurations)
- Continuous row-mounting capability
- Available in lengths from 22 to 92 inches


Options & Adders

- Asymmetric, half or full reflector available in white or enhanced specular aluminum with a reflectance of 95%
- Micro-perforated full reflector, painted white
- Dimmable and Emergency ballast
- 20 gauge riveted construction
- Aligner clips for row-mounting
- Convenience outlet
- Rocker switch with optional built-in circuit breaker

Applications


- Coves
- Display Cabinets
- Garages and Workshops
- Storage Areas
- Task Lighting

Dimensions

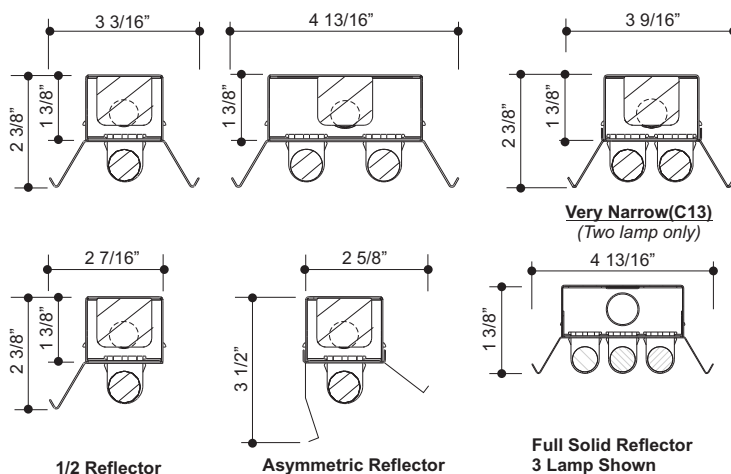

Cross Sections

MODEL CONFIGURATION		Nominal Length	Actual Length A (in.)
One Lamp	Two Lamp		
122	222	2'	22 7/16"
134	234	3'	34 1/4"
146	246	4'	46 1/16"
158	258	5'	57 7/8"
134/2	234/2	6'	68 1/2"
146/2	246/2	8'	92 1/16"

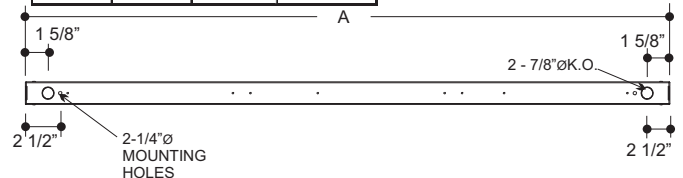

Back View 1 Lamp

FIND

Five Industrial T5

Premium-Grade T5 Fluorescent Strip Luminaire



Ordering



Certain configurations may not be available.
Consult the factory for more information.