

Project
Type
Date
Cat #

Application Features

Specification-grade flange kit can quickly and easily convert the most common T-Bar luminaires into a drywall-flanged luminaire.



Specifications

Mounting

Steel brackets with vertical adjustability are provided to tension-mount side flanges against ceiling opening. Holes provided for chain-mounting support to building structure. End flanges are pressure fit and are removable to permit for row-mounting. Requires only 3" clearance over fixture depth i.e. a 4" deep fixture requires only 7" cavity depth (in more shallow cavity applications, fixture may be inserted prior to installation of flange kit).

Construction

Die and brake-formed, heavy-gauge steel.

Finish

White, polyester powder painted visible surfaces.

Features

- Available in 1x4, 2x2 and 2x4 configurations
- Adjustable for drywall, plaster and similar type ceilings up to 1 inch thick
- Economical
- Heavy-duty construction
- Requires only three inch clearance over fixture depth
- Universal - fits most manufacturer's T-Bar luminaires

Options & Adders


- Consult factory for other finishes

Applications

- Office Areas
- Recreation Rooms
- Retail Stores and Supermarkets

Dimensions

(UNIVERSAL) FLANGE KIT

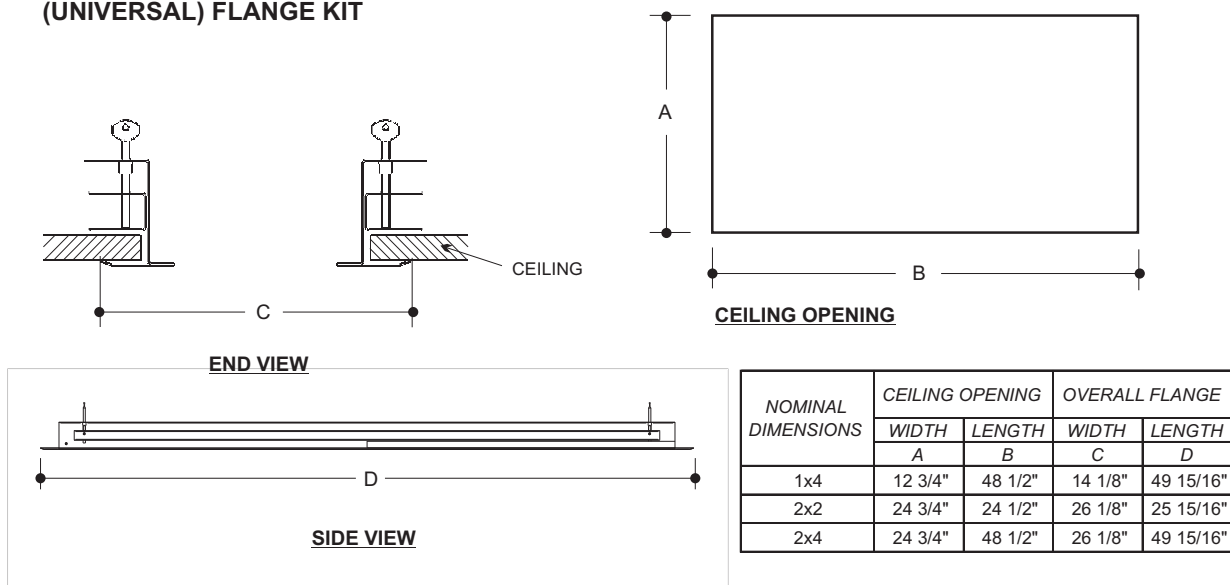

Project
Type
Date
Cat #

FK

Flange Kit

Recessed Drywall Flange Kit



Photometrics - Please consult www.viscor.com for photometric results.

Ordering

FK

-

Options

Size
(Width x Length)

1X4

2x2

2x4

Finish Options (snow white is standard)

☐ (Blank) - Snow White

F04 - T-Bar White

* - Other (Consult Factory)

MISCELLANEOUS LIGHTING