Viscor Inc. 35 Oak Street Toronto, ON Canada M9N 1A1

LCOMN - Strip Luminaire Installation ERP: IIS00162

NOTES

- Installation should be completed by an individual familiar with the construction and operation of the luminaire.
- Installation of luminaire must be in accordance with nation and local building and electrical codes.
- Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
- Instructions do not cover all details and all possible product configurations
- Do not restrict luminaire ventilation.
- Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.
- Do not exceed luminaire's maximum ambient temperature.
- Ensure LED luminaire has the correct polarity before installation.
- This product has maximum rated output of 55Vdc. This output complies with the definition of Class 2 per Canadian Electrical Code. This output cannot be accessible based on maximum voltage restrictions for Class 2 circuits in Canadian Electrical Code. This product complies with this requirement since the installation instruction requires installation in restricted access area.
- Do not mount the luminaire to ceiling if convenience outlet option is provided.
- Do not use the luminaire housing as junction box cover unless the housing width is wider than the junction box.

WARNINGS

Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.


Burn:

Allow luminaire to cool before handling luminaire.


Personal Injury:

- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.

Viscor Inc. is not responsible for any injuries due to the improper installation of handling of its products.

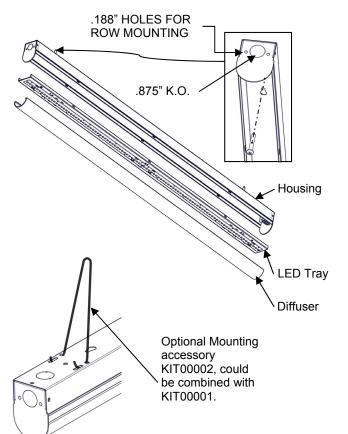

- Carefully remove luminaire from packaging.
- Snap off diffuser and remove LED tray.
- Connect ground wire from electrical supply to the ground wire on the luminaire. If no luminaire ground wire is present, attach the electrical supply ground wire directly to the ground screw located on the luminaire.
- Connect electrical supply wires to the corresponding wires from the
- Place the LED tray back onto the housing and secure into place.
- Snap on diffuser.
- If provided, mount speedy hanger onto luminaire, attach chains (if ordered) to speedy hanger and install chains onto structure.



For Continuous Row Mounting:

Remove .875" knockouts from the end plates of the connecting ends of each luminaire. Thread chase-nipple (by others) through each of the .875" knockouts and secure in place using a nut. Insert wiring through the chase-nipple. For alignment, punch out 2- .1875" flatten knockout on each end and insert #8x32 fastener and nut (by others).







