

For Commercial & Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Model Governor™80M2

Toilet Fill Valve and Thermal Expansion Relief Valve

Size: 8 3/4" to 12 3/4" (222 to 324mm)

The Governor™80M2 is a feature rich universal toilet tank fill valve designed to protect plumbing systems and to conserve water. As a fill valve, it is able to detect a leaking toilet flapper and to prevent the tank from continuously refilling until a repair is made. The override feature enables the toilet to continue to be used until the flapper can be replaced.

The Governor™80M2 is also a thermal expansion pressure relief valve limiting supply line pressure and protecting plumbing from the damaging effects of pressure surges due to thermal expansion. The Governor™80M2's water conservation feature helps to eliminate the "overflow" condition present with traditional toilet fill valves. The adjustable flow control on the primer tube allows the tank to fill to the appropriate level without overflowing. The Governor™80M2 also acts as an anti-siphon backflow preventer keeping tank water from backing up into the potable water supply.

Features

- Leak sensor alerts you to a leaking flapper
- Surge relief limits the supply line pressure to 80psi (552 kPa)
- Simple installation – No tools required
- Adjustable water flow control conserves water
- Manual float lock allows toilet to be used until repair can be made
- Adjustable primer flow control
- Prevents backflow of toilet tank water into potable water supply
- Adjustable to fit most standard toilet tanks



Governor™80M2

U.S. Pat. No. 8,132,273

Pressure – Temperature

Maximum Working Pressure: 80psi (552 kPa)

Temperature Range: 33°F – 110°F (0.5°C – 43.3°C)

Materials

Body: ABS and Acetal Plastic

Gasket: Black rubber

Standards




1002-2008

Dimensions

MODEL	SIZE
Gov80M2-ADJ	8¾" to 12¾"

Typical Installation

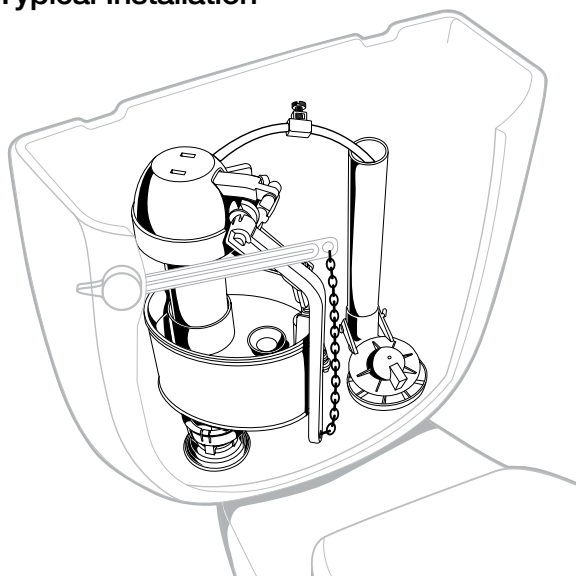

A Watts Water Technologies Company



ISO 9001-2008
CERTIFIED

USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca