

For Water Heater/Tank Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

Model N36-M1

Vacuum Relief Valve

Sizes: 1/2" – 3/4" Male NPT

Features

- Low profile
- All brass body
- Protective cap
- Suitable for low pressure steam and water service
- Tested and rated to ANSI Z21.22
- CSA certified

Applications

- Domestic water heaters and supply tanks
- Table top heaters
- Jacketed steam kettles
- Unit heaters
- Low pressure steam systems
- Steam coil heaters

Note: Vacuum relief valves are not designed or approved as back-siphonage backflow preventers. For protection against back-siphonage install Watts Series 288A vacuum breakers.

Standards

Tested and rated to ANSI Z21.22
 CSA certified

Specifications

A Watts Model N36-M1 Vacuum Relief Valve shall be installed on domestic hot water supply tanks/ heaters/ unit heaters/ steam kettles as indicated on plans. The vacuum relief valve shall be ANSI Z21.22 rated and CSA certified. The vacuum relief valve shall have an all brass body and include a protective cap.



N36-M1

Tested and rated under "ANSI Z21.22 Relief Valves for Hot Water Supply Systems".

For automatic venting of a closed system to atmosphere when a vacuum is created. The Watts N36-M1 Vacuum Relief Valve permits air to enter and prevent vacuum conditions that could siphon the water from the system, resulting in collapse of a tank or water heater or equipment burn out.

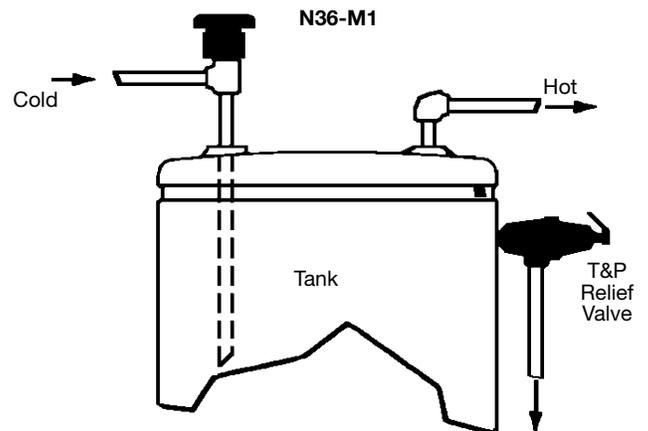


Figure 1
Domestic Hot Water Supply Tanks and Heaters with Top Supply


NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



Materials

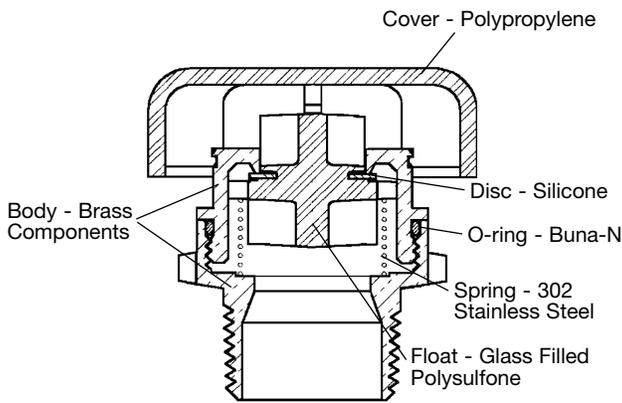


Pressure – Temperature

Maximum steam working pressure: 15 psi (1.03 bars)

Maximum temperature: 250°F (121°C)

Dimensions – Weights

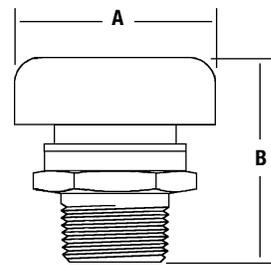

SIZE	DIMENSIONS				WEIGHT	
	A		B		oz.	gr
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>		
½	2	50	2	50	4	113
¾	2	50	2	50	4	113

Capacity

SIZE	MODEL	VENTING CAPACITY	
		CFM	LPM
<i>in.</i>			
½	N36-M1	15	425
¾	N36-M1	15	425

Typical Installations

Water Service

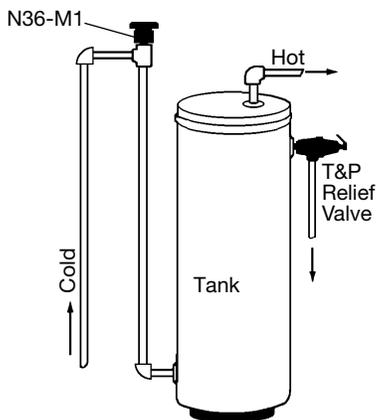


Figure 2
Domestic Hot Water Supply Tanks and Heaters with Bottom Feed

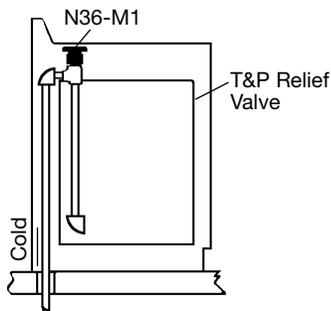


Figure 3
Table Top Heaters

Steam Service

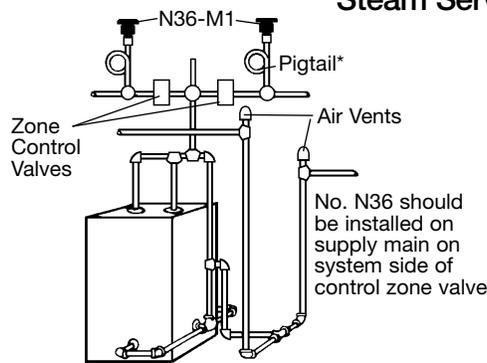


Figure 4
Low Pressure Steam Heating Systems

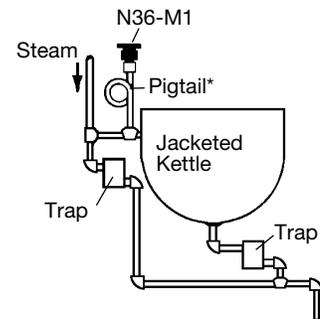


Figure 5
Jacketed Kettles

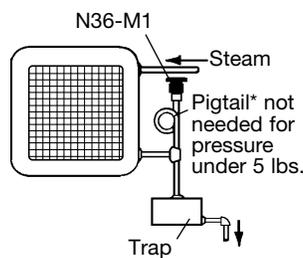


Figure 6
Unit Heaters

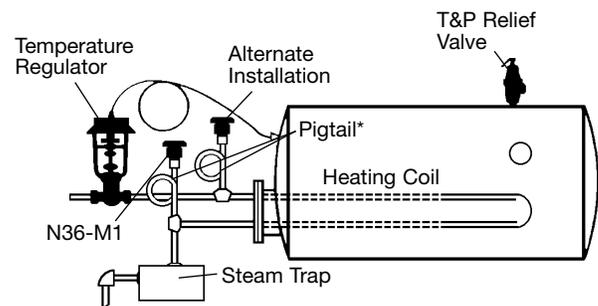


Figure 7
Steam Coil Heaters

***Note:** When used for steam service, be sure to use pigtail to prevent live steam from damaging N36 valve.

