

Direct-Vent Furnaces



14,000 Btu/hr.

Great for garage or workshop heating!

These models feature a sealed combustion chamber that makes them an ideal choice for adding comfort to your garage, workshop or anywhere heat is needed.

Attractive styling, economical and safe heating comfort with these popular home furnaces.

Williams' compact, space-saving direct-vent furnaces feature low-cost installation. These models use no inside air for operation.

Heating rooms individually allows comfort in areas while saving fuel costs in unused areas.

For additional money-saving efficiency, install one of our optional blowers.



22,000 and 30,000 Btu/hr.

Design Features

- ✓ No electricity required
- ✓ "Matchless" pilot igniter
- ✓ Easy installation - all vent material included
- ✓ All vent caps include built-in "Bird Guard"
- ✓ Long-life, ceramic-coated combustion chamber (22,000 and 30,000 Btu/hr. models)
- ✓ Automatic temperature and safety controls
- ✓ Sealed combustion chamber requires no room air
- ✓ Attractive, durable, soft-white, scratch-resistant finish blends with any décor
- ✓ Natural and propane gas models (conversion kits available)
- ✓ Thermostat included, may be wall- or cabinet-mounted

Direct-Vent Furnaces

Model Number		Btu/hr. Input Rating	Btu/hr. Output Rating	Efficiency Percentage		Dimensions			Maximum Wall Thickness	Type of Control	Shipping Weight (lbs.)
Natural	Propane			Thermal	AFUE	Width	Depth	Height			
1403822	1403821	14,000	9,800	73	65	18"	7 1/8"	26 3/4"	24"	Millivolt Wall	56
2203822	2203821	22,000	16,462	75	67	32 1/8"	10 1/4"	28"	24"	Millivolt Wall	98
3003822	3003821	30,000	21,000	70	66	32 1/8"	10 1/4"	28"	24"	Millivolt Wall	100

Gas connection: 1/2" • * Venting shipped with furnace for up to 9" wall thickness, 24" wall thickness available with use of vent extension accessories.

Features

"Matchless" Pilot Igniter

All models include a "matchless" pilot igniter and glass observation door. Assures convenient pilot lighting without matches.

Automatic Thermostat - Included with all Models

(No Electricity Required)

Equipped with a self-generating, millivolt thermostat that may be wall- or cabinet-mounted.

Contemporary Finish


Light, soft-white powder-coat, scratch-resistant finish to blend with any décor.

"Bird Guard"

All vent caps include built-in "Bird Guard".

Dimensions and Clearances

- 2" from intersecting wall.
- 24" from top of appliance to ceiling or other obstructions for 14,000 Btu/hr. models.
- 30" from top of appliance to ceiling or other obstructions for 22,000 and 30,000 Btu/hr. models.

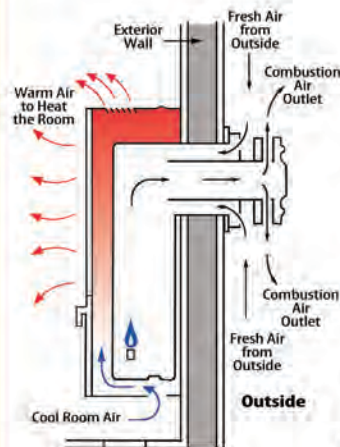

Direct-Vent Safety

For clean, comfortable heat when and where you want it. The gas flame is completely sealed inside, away from all contact with room air. Air necessary for combustion is drawn into the chamber from outside through the vent, and combustion products are vented directly to the outside. Only clean, gentle heat, in continuous circulation is delivered into the room. Windows and doors stay closed because no room air is used for combustion.



Great During
Power Outages!
No Electricity
Required

Accessories

High-Capacity Blower

Blower is easily added to the furnace. Comes with a fully automatic fan switch, 115V power supply required.

Model 2302 for 22,000 and 30,000 Btu/hr.

Model 2303 for 14,000 Btu/hr.


Shipping weight 6 lbs.



Vent-Cap Guard

Protects pedestrian traffic from vent cap heat.

Model 9308 - Shipping weight 3 lbs.



Vent Shield

Insulated, galvanized sheet for all direct-vent units.

Model 4318 - Shipping weight 9 lbs. (Oversized)



Vent Extensions

To meet your installations needs, all models accommodate optional through-the-wall vent which may extend up to a 24" maximum

Model	Length	Application	Shipping Weight
9301	15"	22038 & 30038 Series	7 lbs.
9302	24"	22038 Series	10 lbs.
9303	24"	14038 & 30038 Series	10 lbs.
9304	15"	14038 Series	7 lbs.

Face Panels

Model	Application	Shipping Weight
4309	14038 Series	16 lbs.
4313	22038 & 30038 Series	29 lbs.

Thin-Wall Collar Kits

Model 9307 - For wall thicknesses from 1 to 5". Installs with vent kit. Shipping weight 4 lbs.

Conversion Kits

14038 Series - 8939 - Natural Gas to L.P. Gas

20038 Series - 8940 - Natural Gas to L.P. Gas

30038 Series - 8941 - Natural Gas to L.P. Gas

8942 - L.P. Gas to Natural Gas

8943 - L.P. Gas to Natural Gas

8944 - L.P. Gas to Natural Gas

High-Altitude Models

Models	Natural Gas		L.P. Gas		Models	NG	LP
ELEVATION	14,000 Btu/hr.	22,000 Btu/hr.	14,000 Btu/hr.	22,000 Btu/hr.	ELEVATION	30,000 Btu/hr.	30,000 Btu/hr.
2,001 TO 4,000'	1413822	2213822	1413821	2213821	2,001 TO 4,000'	3003822	3003821
4,001 TO 6,000'	1433822	2233822	1433821	2233821	4,001 TO 6,000'	3033822	3033821
6,000 TO 8,000'	1453822	2253822	1453821	2253821	6,000 TO 8,000'	3053822	3053821



Scan for more
information on
Williams' products



WILLIAMS
Comfort Products

250 West Laurel Street - Colton, California 92324 USA
(909) 825-0993 - Fax: (909) 370-0581 or (909) 824-8009
Consumer Line: (888) 256-6465
Website: www.e-wfc.com

facebook.com/WilliamsProducts · linkedin.com/company/williams
twitter.com/WilliamsProduct · instagram.com/williamsproducts · youtube.com/user/WilliamsProducts

Important

- Read owner's manual before using/installing.
- Photographs are representative.
- Check local codes and ordinances for permitted uses.
- Consult installation manual for clearances prior to installation.
- We reserve the right to amend product specifications without notice.
- Installation and servicing recommended by a qualified service person.
- Venting must comply with the installation manual.
- Massachusetts approval G1-0713-515.
- Please read the warranty for any limitations for disclaimers.
- Combustion chamber carries a ten-year limited warranty. All other parts carry a one-year limited warranty.