

SLM LED SLIM FLOOD LIGHT

ecoLED[™]
A DIVISION OF ecopower[®]



FEATURES

- Patented design is ultra slim, small size and light weight
- High purity aluminum alloy with good heat dissipation
- 10w - 50w easily mounts on waterproof J-box

OPTIONS

- Beam Angle for 100-200w only

Ultra Slim 10watt to 200 watt. Up to 130 L/W. Yolk mount. Tempered glass. 110° and 60° beam angles.

TECHNICAL SPECIFICATIONS

Housing	Aluminum
Finish	Black 5 Stage Thermoplastic Poly Coat
Mounting	Yoke
Lens	Tempered Glass
Applications	Walkway, security, pathway, area, lot lighting

ELECTRICAL SPECIFICATIONS

LED Engine	Philips SMD
Available Wattages	10w, 20w, 30w, 50w, 100w, 150w & 200w
Power Factor	>0.9
Ambient temperature	-30 to 40°C -22 to 104°F
Available Voltages	120vAC (10w/20w), 120-277vAC (30w/50w/100w/150w/200w)

OPTICAL & PERFORMANCE SPECIFICATIONS

IP Rating	IP65
CRI	>80
Beam Angles	110° standard & 60° available on 100w/150w/200w
Efficacy	10/120L/W (10-50w) 130L/W (100-200w)
L70	>54,000 + hours
Certifications	LM79, LM80, RoHS, CSA, meets all requirements/listings for North American incentives. DLC listed - See model listings on this spec sheet.



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian Manufacturer

©2019 Ecopower Inc. All rights reserved.
REV-0122.19-153323


Warranty is only valid based on fixtures operating for 12 hours or less per day.

SLM LED SLIM FLOOD LIGHT

ecOLED™
A DIVISION OF **ecPOWER®**


DIMENSIONS

10w / 20w / 30w / 50w

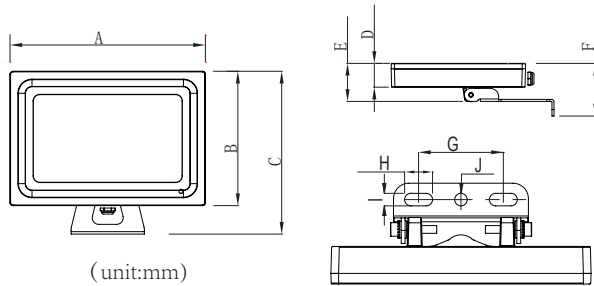


Wattage	A	B	C	D	E	F	G	H	I	J
10w	135	90	123	19.5	34	52	44	14.5	6.5	Ø6.5
20w	190	130	164	23.5	38	56	46	17	7	Ø7
30w	240	165	200	29.5	47	65	46	17	7	Ø7
50w	299	210	264	36	55	76	50	18	8	Ø8

100w

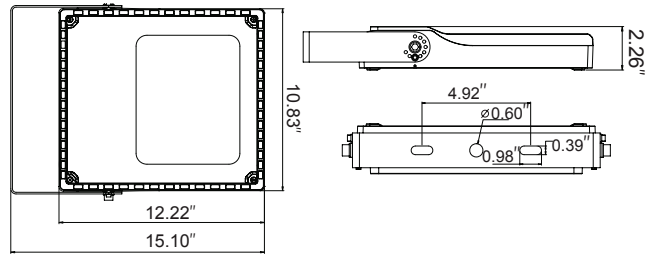

150-200w

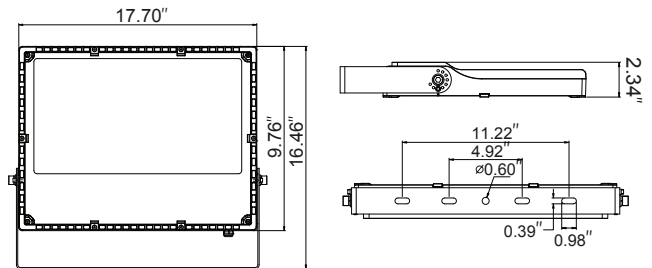

DLC LISTED PRODUCTS

Models		Classification	Version
SLM10WNWV4	SLM30WCWV4	Standard	4.2
SLM10WCWV4	SLM30WWV4		
SLM20WNWV4	SLM50WWV4		
SLM20WCWV4	SLM10WWV4		
SLM30WNWV4	SLM50WNWV4		
SLM50WCWV4		Premium	4.2
SLM150WCWV4	SLM100WCWV4		
SLM150WNWV4	SLM100WNWV4		
SLM200WNWV4	SLM200WCWV4		



PRODUCT CODE GENERATOR Some combinations of adders may not be possible, email quotes@ecopowerinc.com for further info.

SLM				-	
	Wattage	Kelvin	Voltage		Options
	10w 20w 30w 50w 100w 150w 200w	WW (3000K) NW (4000K) CW (5000K)	V4 (120vAC)* (100/277vAC)**		60 60 Degree (100-200w only)

*only available in 10w & 20w
**only available in 30w-200w

info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian
Manufacturer

©2019 Ecopower Inc. All rights reserved.
REV-0305.19-142910