WPG
LED GLASS WALL PACKS
2ND GEN

ecoLED™
A DIVISION OF ecoPOWER



FEATURES

- Easy Installation
- No Mercury; No Recycling Costs
- 40w & 60w: LiFud Driver
- 80w & 120w: Sosen Driver

OPTIONS

- Photocell
- 347v Option
- Wireguard
- 150w Available in PC lens Only
- PC Polycarbonate Lens - Ecopower's PC Lens Includes Anti-Plasticizer Migration Agents and UV Stabilizer. This Prevents UV Impacts and Reduces Yellowing.

Traditional Wall Pack with COB Chip On Board technology allow for even low glare that outperforms the competition. Easy hinge out/detachable front section allows for ease of install. Also available in cost effective non yellowing PC lens producing 130 Lumens per Watt.

TECHNICAL SPECIFICATIONS	
Housing	Aluminum body
Finish	Bronze
Mounting	Flush mount
Applications	Walkways, parking lots, alleyways, entrance ways, tunnels and security lighting

ELECTRICAL SPECIFICATIONS	
LED Engine	Jufei
Power Factor	>0.95
Ambient temperature	-40° to 55°C
Available Voltages	100-277v standard, 347v option

OPTICAL & PERFORMANCE SPECIFICATIONS	
Lumen Output	40w: 5,200L | 60w: 7,800L | 80w: 10,400L 90w: 11,700L | 120w: 15,600L | 150w: 19,500L
IP Rating	IP65
Beam Angle	90° to 110°C
NEMA Rating	4x
CRI	>80
LM80	L70 = 50,000+ hours
LM79	140 L+W ±5%
Certifications	Approved to CSA and UL standards, DLC listed (see full list of models on next page)

c UL us LISTED

10 YEAR WARRANTY

info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086

25 EST. 1992 | A Canadian Manufacturer

©2019 Ecopower Inc. All rights reserved.
REV-1101.19-151829


Warranty is only valid based on fixtures operating for 12 hours or less per day.

WPG
LED GLASS WALL PACKS
2ND GEN


ecoLED™
A DIVISION OF ecoPOWER

DIMENSIONS

40w, 60w, 80w 120w

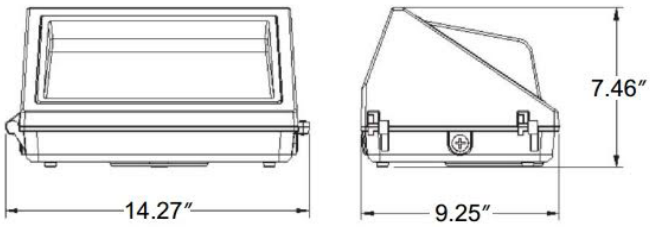

150w

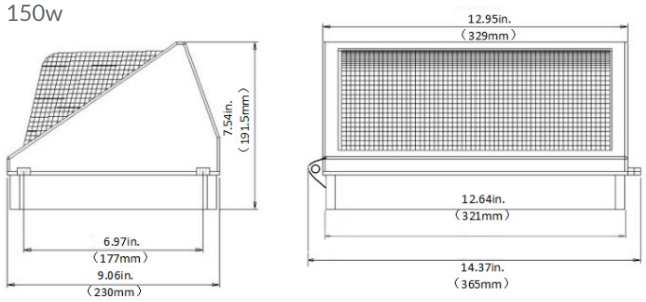

DLC LISTED PRODUCTS

Models			Classification	Version
WPG40WCWV4	WPG40WNWV4	WPG120WCWV4	Premium	4.3
WPG60WCWV4	WPG60WNWV4	WPG120WNWV4		
WPG80WCWV4	WPG80WNWV4			

DLC QPL LISTED™

PRODUCT CODE GENERATOR

Some combinations of adders may not be possible, email quotes@ecopowerled.com for further info.

WPG [ ] [ ] [ ] – [ ]

Wattage

40w
60w
80w
90w
120w
150w

Kelvin

WW (3000K)
NW (4000K)
CW (5000K)

Voltage

V4 (100-277v)
V5 (347v)

Options

B00-1	Photocell 120v
B00-2	Photocell 220v
B00-3	Photocell 277v
B07	Driver Disconnect - Inline power disconnect (CSA, UL req'd for voltages above 150v)
WG	Wireguard
PC	Polycarbonate lens



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086

25 EST. 1992 | A Canadian Manufacturer

©2019 Ecopower Inc. All rights reserved.
REV-1101.19-151829