

Specifications

- Heavy brass construction for durability and reliability
- Pressure balancing volume control ceramic cartridge ensures anti-scald operation with a life long trouble free service
- Single lever handle operation allows temperature and volume control
- Max-temperature limit stop for added safety
- Integral stop valves for an easy maintenance
- Dual inlet and outlet ports – 1/2" CxC soldering & 1/2" NPT thread
- SSI "Speed Connector" for brass design tub spout
- 8" shower arm with square escutcheon
- 6" ABS square shower head
- Pressure balancing rough-in valve with built-in diverter F1000B is sold separately.

Flow Rate

- Spout 5.5 gpm @ 60 psig
- Fixed shower head 1.8 gpm @ 60 psig

Finish


- CP (Polished Chrome)
- PVD-BN (PVD Brushed Nickel)

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- ADA
- IAPMO / cUPC (pending)

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.

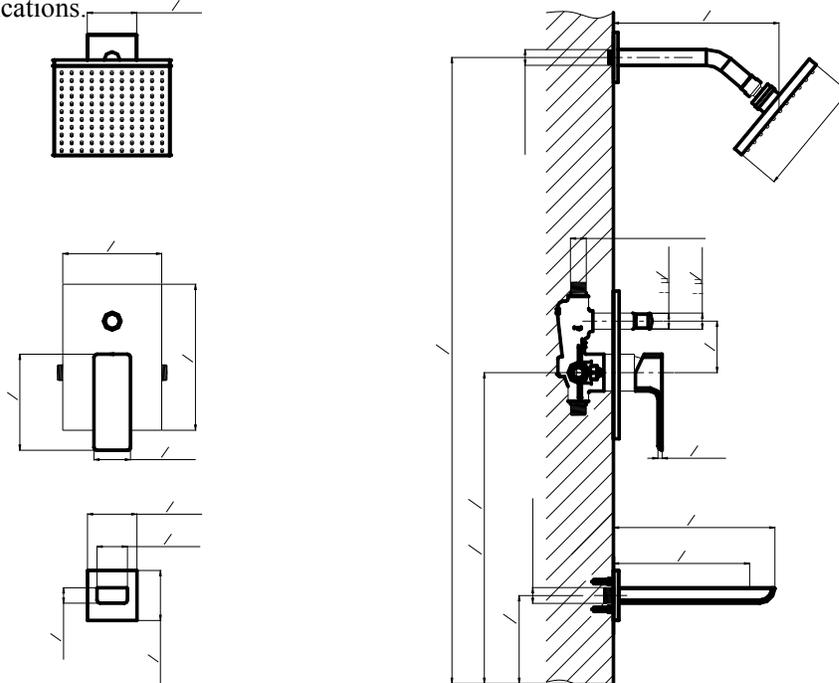

fluid Quad Series Tub and Shower Trim Set Model: F1620T

