

1. PRODUCT SUMMARY


The Primex PWD6S Flush Mount NID Housing Weather proof design High impact flame retardant polymer Sealed self contained housing features a grounding terminated post Top and rear body knockouts and an entry base port

2. PRODUCT DIMENSIONS

Inside H 7.63"/W: 5.90"/D: 4.60"

3. FEATURES & BENEFITS

- Reduce deployment cost by eliminating site visits required to connect and splice fiber runs.
- Simplify service calls with 'connectorized" fiber weather conditions and extreme environments and ample slack storage capacity.
- Maintain weatherproof integrity with external wall mounting brackets that eliminate the need to drill through box.
- Servicing is faster and easier with removable 1" entry/exit ports that eliminate the need to disconnect fiber before splicing.
- Save time during installation with a 180 degree hinged lid that will not close during service.
- Assure safety and durability with flame retardant polymer that meets UL safety standards and UV protection that complies with F1 weatherable requirements.

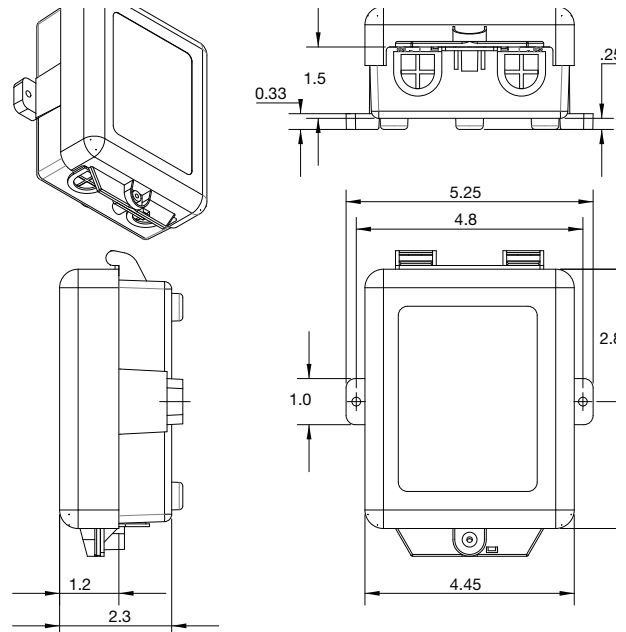

FOR MORE INFORMATION CONTACT:

20160 92A Avenue Langley BC V1M 3A4 Canada

1.877.881.7875 info@primexfits.com primexfits.com