



**Model WX-3060**

Dimensions

<b><u>LOA:</u></b>	60"	152 cm
<b><u>Diameter:</u></b>	3"	7.6 cm
<b><u>OD:</u></b>	4.25"	10.8 cm
<b><u>Weight:</u></b>	32.7 lbs	14.9 kg
<b><u>Fittings:</u></b>	3/4"	1.95 cm

Male

Design Specifications


<b><u>DWV:</u></b>	3" Copper	ASTM B306
<b><u>Copper Waterline:</u></b>	3/4 inch Type L	ASTM 88/NSF 61
<b><u>Working pressure:</u></b>	3" DWV	273 psi @ 100F
	Type L	631 psi @ 100F

**Certification Pressure** 150 psi

<u>Efficiency</u>	<u>Pressure Loss</u>	9.5 l/min
50.1%	3.2 Psi	

Shipping Dimensions and Weights

<b><u>LOA:</u></b>	61"	155 cm
<b><u>Width:</u></b>	7"	18 cm
<b><u>Height:</u></b>	6"	16 cm
<b><u>Weight:</u></b>	37 lbs	16.7 kg

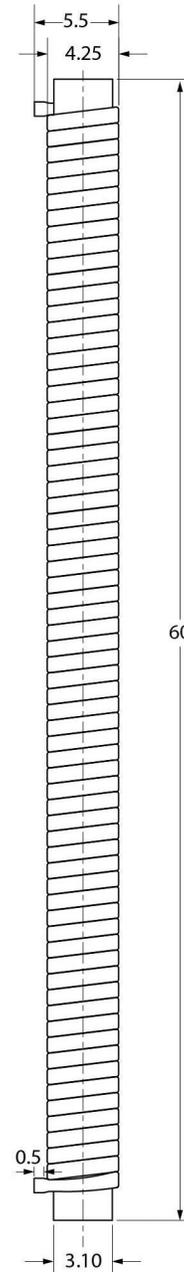

Verified to CSA B55.1



**Intertek**  
4001354

Certified to CSA B55-2



**Intertek**  
4001354