

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Allows easy access to the manifold through its locking, removable door. Visible parts are white powder coated. Openings for mains piping on left and right sides. Frame and door enable a structural flush seal. Electrical wiring openings on top & sides. Adjustable depth allows for mounting a manifold in a 2x4 or 2x6 wall. Space is available for mounting a StatLink[®] module above the manifold.


Technical Data

Material:..... Galvanized steel

Standards / Listings


n/a

Qty	Stk. #	A	B	Dimension C	D	E	Weight
	71524	24" (610 mm)	23-1/4" (590 mm)	3-7/8" to 7-5/8" (97 to 195 mm)	25-3/4" (655 mm)	24-1/2" (622 mm)	13 lb 5.9 kg
	71530	29-15/16" (760 mm)	23-1/4" (590 mm)	3-7/8" to 7-5/8" (97 to 195 mm)	31-3/4" (805 mm)	24-1/2" (622 mm)	32 lb 14.5 kg
	71541	41-3/4" (1060 mm)	23-1/4" (590 mm)	3-7/8" to 7-5/8" (97 to 195 mm)	43-1/2" (1105 mm)	24-1/2" (622 mm)	40 lb 18.1 kg

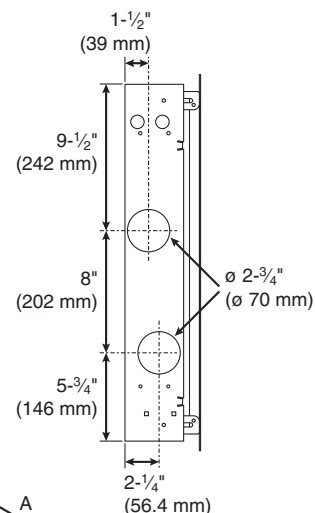


Options

Key lock (#71901)
that can field replace
the standard coin/
screwdriver lock of the
manifold housing door.




Qty	Stk. #
	71901

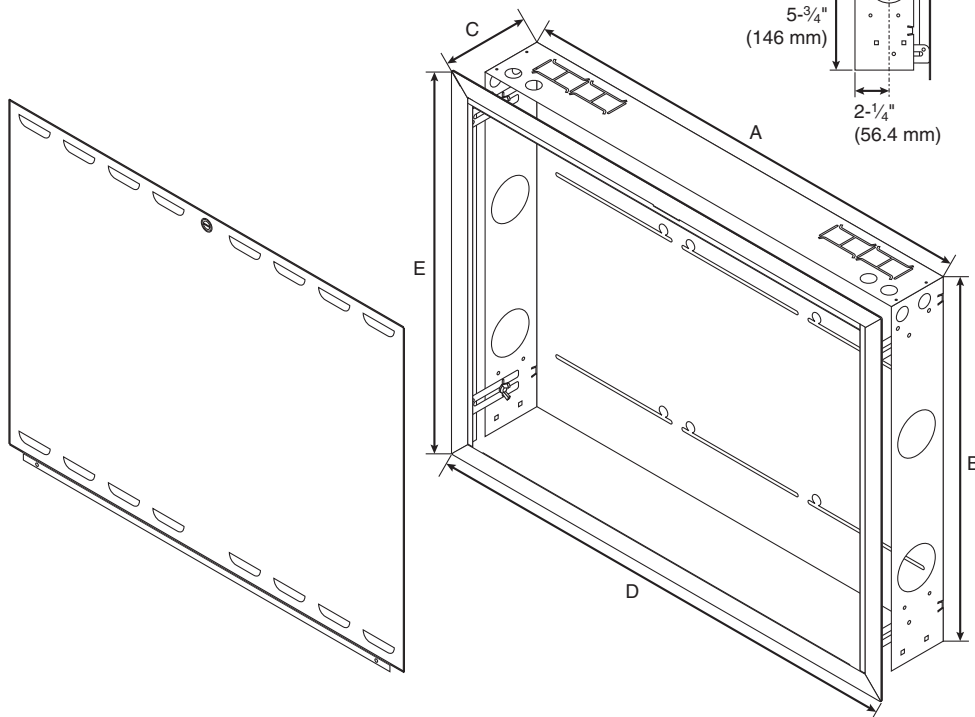

Housing Selection


This table includes an allowance for 90° mains piping ① or straight isolation valves ②.

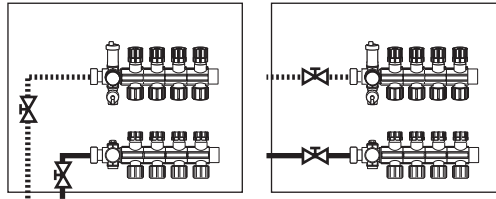

# of loops	TwistSeal® Manifold Assembly Kit #:						Stainless Steel Manifold
	79400	79401	79402	79200	79201	79202	
2	71524	71524	71524	71524	71524	71524	71524
3	71524	71524	71524	71524	71524	71524	71524
4	71524	71524	71530	71524	71524	71524	71530
5	71530	71524	71530	71530	71530	71530	71530
6	71530	71530	71541	71530	71530	71530	71530
7	71541	71530	71541	71530	71530	71530	71541
8	71541	71541	71541	71541	71541	71541	71541
9	71541	71541	71541	71541	71541	71541	71541
10	71541	71541	71541	71541	71541	71541	71541
11	71541	71541	-	71541	71541	71541	71541
12	-	71541	-	71541	71541	71541	71541

Housing Selection

This table is for manifolds only, no piping allowances ③.



# of loops	TwistSeal® Manifold Assembly Kit #:						Stainless Steel Manifold
	79400	79401	79402	79200	79201	79202	
2	71524	71524	71524	71524	71524	71524	71524
3	71524	71524	71524	71524	71524	71524	71524
4	71524	71524	71524	71524	71524	71524	71524
5	71524	71524	71524	71524	71524	71524	71524
6	71524	71524	71524	71524	71524	71524	71524
7	71524	71524	71530	71524	71524	71524	71524
8	71530	71524	71530	71524	71524	71524	71530
9	71530	71530	71541	71530	71530	71530	71530
10	71541	71530	71541	71530	71530	71530	71530
11	71541	71541	71541	71541	71541	71541	71541
12	71541	71541	71541	71541	71541	71541	71541
13	71541	71541	71541	71541	71541	71541	n/a
14	71541	71541	-	71541	71541	71541	n/a
15	-	71541	-	71541	71541	71541	n/a

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- Recessed Manifold Housing Installation Instructions (L671500)
- Component Warranty