


Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description

Allows easy access to the manifold through a locking, removable, vented door. Stainless steel recessed housing and cover for locations that require corrosion resistance. Comes with one key lock and one coin/screwdriver lock per door. Space is available for mounting a StatLink® module above the manifold.

Qty	Stk. #	Dimension					# of Locks
		A	B	C	D	E	
	72534SS	34 1/2" (876 mm)	28 1/2" (724 mm)	5 7/8" (149 mm)	36" (915 mm)	30" (762 mm)	2
	72542SS	42 1/2" (1080 mm)	28 1/2" (724 mm)	5 7/8" (149 mm)	44" (1118 mm)	30" (762 mm)	2
	72546SS	46 1/2" (1180 mm)	28 1/2" (724 mm)	5 7/8" (149 mm)	48" (1219 mm)	30" (762 mm)	3

#71901



### Options


Qty	Stk. #	Description
1	71901	Key Lock that can field replace the coin/screwdriver lock of the manifold housing door.

### Technical Data

#### Specifications

Material - backplate and housing	304 2B stainless steel
Material - cover	304 2B stainless steel

#### Dimension Diagram

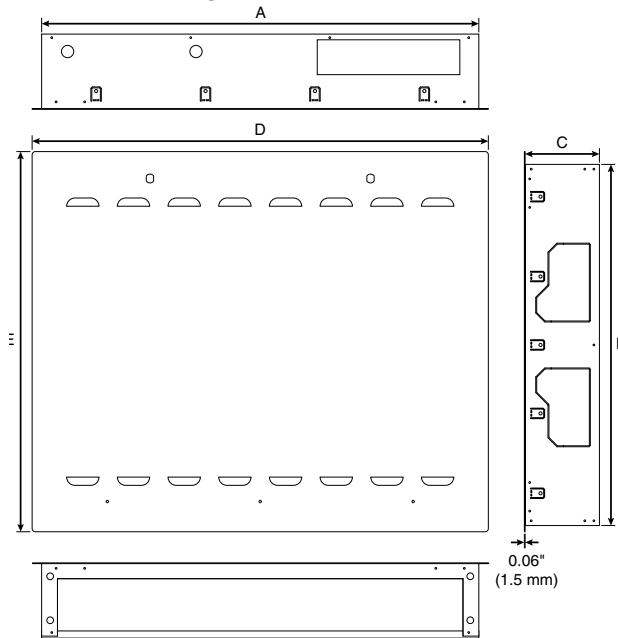

### Installation

Installation must follow all of HeatLink's instructions and guidelines.

### Maintenance

Maintenance must follow all of HeatLink's instructions and guidelines.

### Related Documents

- L672500 Recessed Manifold Housing Installation Instructions
- HeatLink Limited Heating Warranty