

SOCKETS & ACCESSORIES

10F-2Z-C1 Octal (Round) 8 Pin Sockets DIN-Rail or Screw Mounting



Electrical Ratings: 10A @ 250V


Wiring: 1 or 2, solid or stranded, 16-30 AWG

Termination: Plus-minus screw (M3.5x7) with pressure plate. Tighten to recommended torque of 5.2 in-lb (maximum 6.9 in-lb)


Temperature:

Operating, -25° C to 85° C (-13° F to 185° F);
Storage, -40° C to 85° C (-40° F to 185° F)

Approximate Weight: 0.08 lb (36 g)

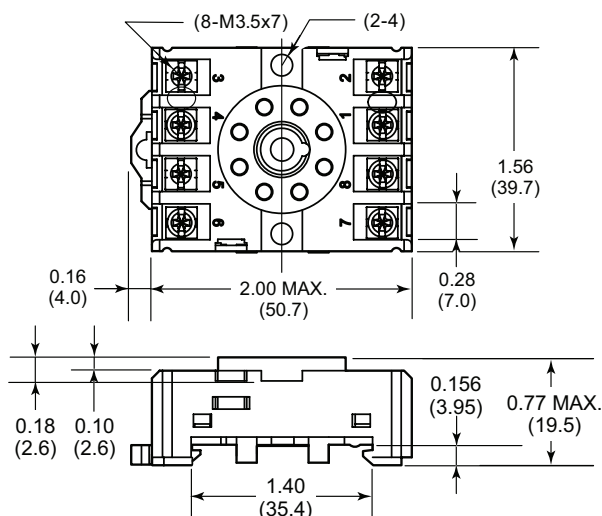

Dimensions in Inches (Millimeters)



Wiring Diagram 367

Approvals:



10F-3Z-C1 Octal (Round) 11 Pin Sockets DIN-Rail or Screw Mounting



Electrical Ratings: 10A @ 250V


Wiring: 1 or 2, solid or stranded, 16-30 AWG

Termination: Plus-minus screw (M3.5-7) with pressure plate. Tighten to recommended torque of 5.2 in-lb (maximum 6.9 in-lb)


Temperature:

Operating, -25° C to 85° C (-13° F to 185° F);
Storage, -40° C to 85° C (-40° F to 185° F)

Approximate Weight: 0.11 lb (50 g)

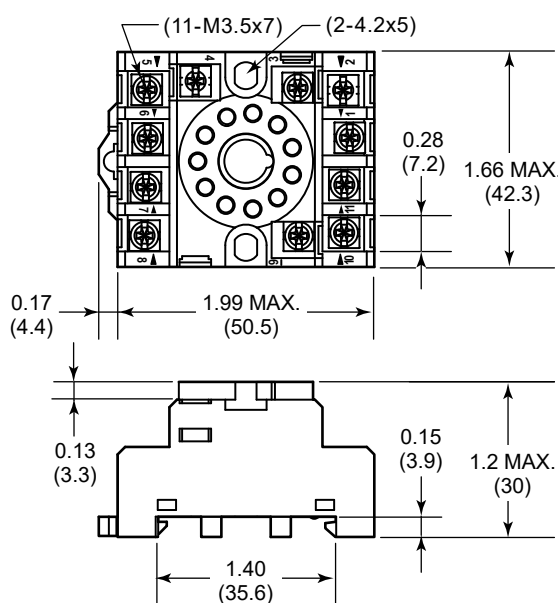

Dimensions in Inches (Millimeters)



Wiring Diagram 368

Approvals:

