

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description


Allows easy access to the manifold through its locking, removable door. Satin coated steel is well suited for painting. Openings for mains piping on left and right sides. Comes with key lock. Depth allows for mounting a manifold in a 2×4 wall. Space is available for mounting a StatLink[®] module above the manifold.

Technical Data

Material - Housing and Backplate:..... 16Ga galvanized steel


Material - Cover: 16Ga satin coated steel

Qty	Stk. #	Dimension						# of locks	Weight
		A	B	C	D	E	F	G	
	71724	24" (610 mm)	23" (584 mm)	3 7/8" (98 mm)	26 5/8" (676 mm)	25 1/2" (648 mm)	5 3/4" (146mm)	9 1/2" (241mm)	1 28.10 lb (12.75 kg)
	71730	30 1/4" (768 mm)	23" (584 mm)	3 7/8" (98 mm)	32 7/8" (835 mm)	25 1/2" (648 mm)	5 3/4" (146mm)	9 1/2" (241mm)	1 34.24 lb (15.53 kg)
	71743	43 1/2" (1105 mm)	23" (584 mm)	3 7/8" (98 mm)	46 1/8" (1172 mm)	25 1/2" (648 mm)	5 3/4" (146mm)	9 1/2" (241mm)	2 47.28 lb (21.45 kg)

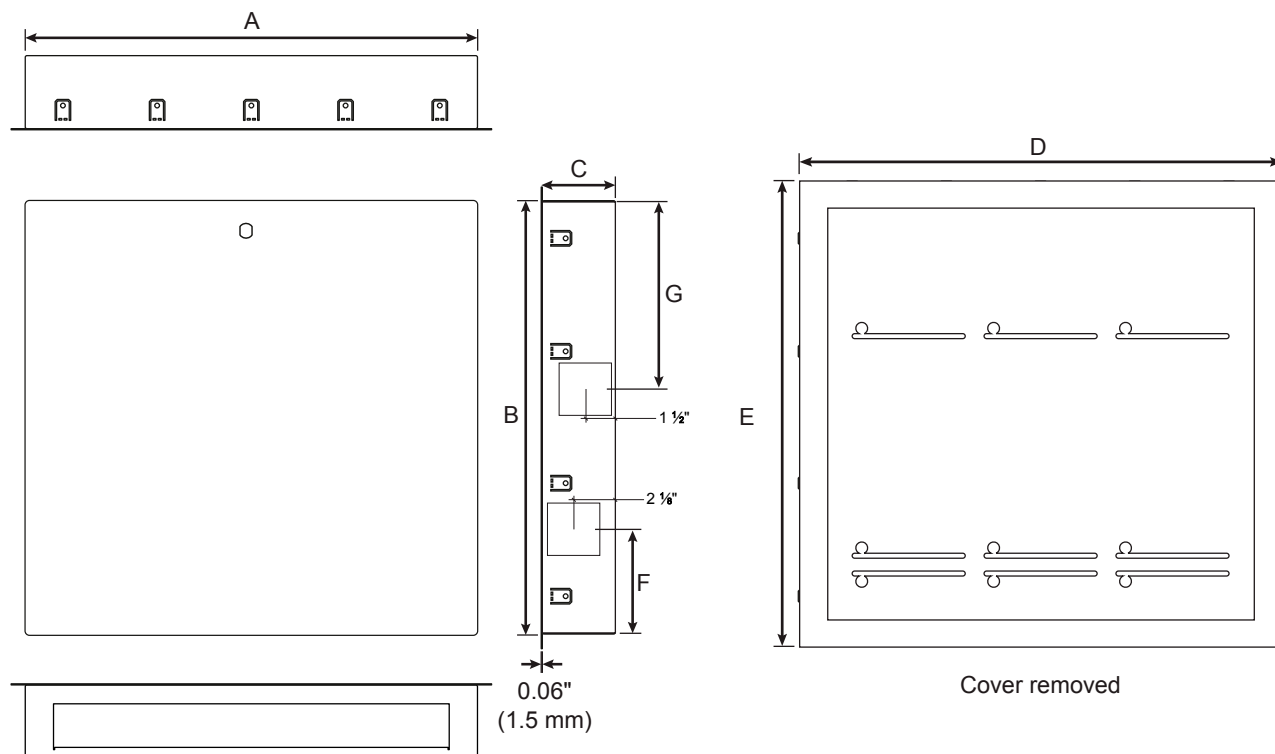

Housing Selection


This table includes an allowance for 90° mains piping ❶ or straight isolation valves ❷.

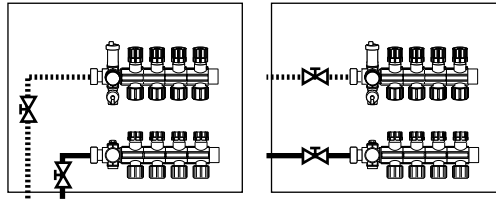

# of loops	TwistSeal® Manifold Assembly Kit #:			1-¼" SS Manifold
	79400	79402	79200	
2	71724	71724	71724	71724
3	71724	71724	71724	71724
4	71724	71730	71724	71730
5	71730	71730	71730	71730
6	71730	71743	71730	71730
7	71743	71743	71730	71743
8	71743	71743	71743	71743
9	71743	71743	71743	71743
10	71743	71743	71743	71743
11	71743	-	71743	71743
12	-	-	71743	71743

Housing Selection

This table is for manifolds only, no piping allowances ❸.



# of loops	TwistSeal® Manifold Assembly Kit #:			1-¼" SS Manifold
	79400	79402	79200	
2	71724	71724	71724	71724
3	71724	71724	71724	71724
4	71724	71724	71724	71724
5	71724	71724	71724	71724
6	71724	71724	71724	71724
7	71724	71730	71724	71724
8	71730	71730	71724	71730
9	71730	71743	71730	71730
10	71743	71743	71730	71730
11	71743	71743	71743	71743
12	71743	71743	71743	71743

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- Recessed Manifold Housing Installation Instructions (L671700)
- HeatLink Limited Heating Warranty