

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Solid no lead (Eco) Brass PEX F1960 × MNPT elbows for PEX-a potable water expansion systems.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

Qty	Stk. #	Size	Dimension, in/(mm)								Weight, lb/(kg)
			A	B	C	D	E	F	ID1	ID2	
	EX28505NL	1/2 PEX × 1/2 MNPT	0.71 (18.0)	0.57 (14.5)	0.42 (10.6)	0.35 (9.0)	0.35 (9.0)	0.55 (14.0)	0.38 (9.7)	0.59 (15.0)	0.097 (0.044)

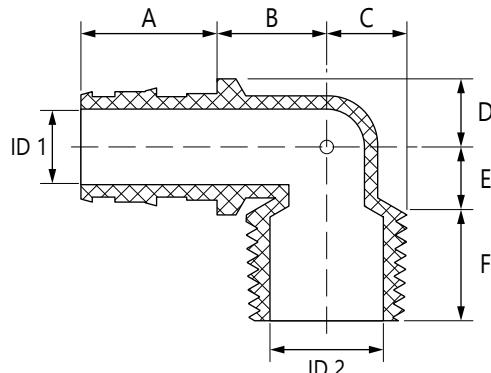

Listings
ICC-ES PMG 1087
cNSFus-pw
cQAlus P371
U.P. Code

Codes	ASTM E84
IMC	ASTM F877
IPC	ASTM F1960
IRC	CSA B137.5
NPC of Canada	NSF/ANSI 14
NSPC	NSF/ANSI 61
UMC	NSF/ANSI 372
UPC	ULC S102.2

Technical Data

Specifications

Material	No Lead (Eco) Brass - C69300
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- F1960 PEX-a Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty