

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 45° elbows for use with PEX-a potable water expansion systems. *The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.*

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.


Qty	Stk. #	Size	Dimension, in/(mm)				Weight, lb/(kg)	
			A	B	C	D		
	EX18441	1 1/2" x 1 1/2"	1.70 (43.3)	2.91 (74)	2.06 (52.3)	2.06 (52.3)	1.08 (27.53)	0.155 (0.070)
	EX18454	2" x 2"	2.15 (54.6)	3.68 (93.5)	2.60 (66.1)	2.60 (66.1)	1.48 (37.69)	0.371 (0.168)

Technical Data

Specifications

Material PPSU

Operating Pressure rating 180°F @ 100psi (82.2°C @ 0.69MPa)

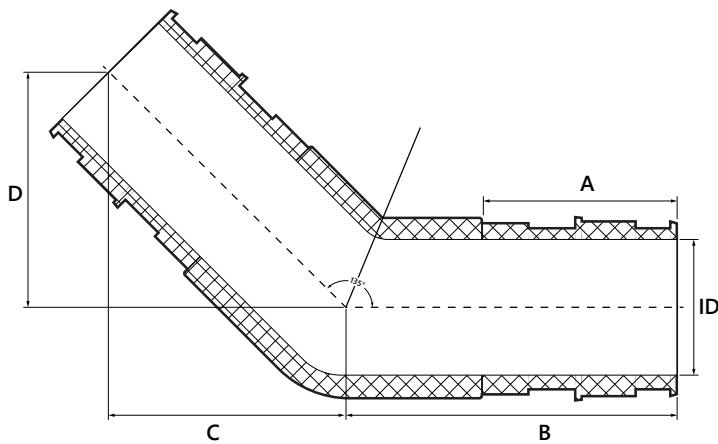

Listings

ICC-ES PMG 1087
cNSFus-pw
cQAlus P371
U.P. Code

Codes

IMC
IPC
NSPC

Standards

ASTM E84
ASTM F877
ASTM F1960
IRC
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)

HeatLink Limited Plumbing Warranty