


Features

- Flow Rate : 6.0 gpm @ 50 psi (2QR100) / 7.0 gpm @ 50 psi (4KR100)
- Safety stop with override function
- Intended for use with Rubinet 1/2" Thermostatic Mixer Valve
- Factory preset at 38°C (100.4°F)
- 1/2" NPT connections
- Mixer control
- Adjustable 1/2" Quarter-turn Ceramic Disk Cartridge
- 2 Way Diverter Valve
- Brass Construction



TEMPERATURE CONTROL VALVE WITH BUILT-IN SERVICE STOPS AND TWO WAY DIVERTER ROUGH-IN

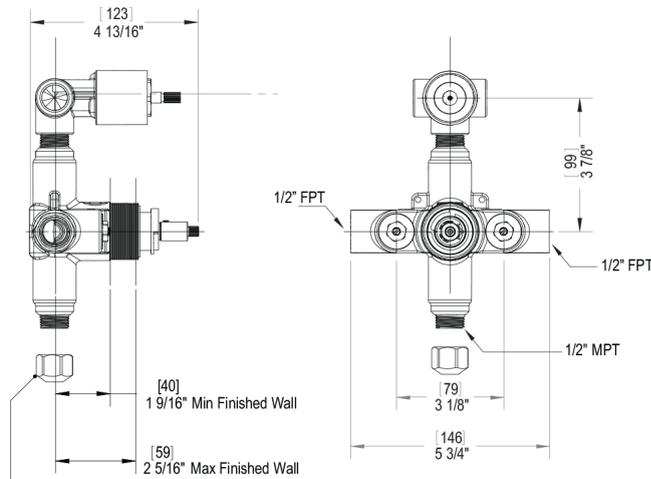

* use cap only if extra volume control is not used

