


Features

- Flow Rate 4MR100 (1/2") : 8.0 gpm @ 50 psi / 4MR300 (3/4") : 10.0 gpm @ 50 psi
- Safety stop with override function
- Temperature range from 15°C (59°F) to 60°C (140°F)
- Factory preset at 38°C (100.4°F)
- Mixer control
- Brass construction



TEMPERATURE CONTROL VALVE WITH BUILT-IN STOPS ROUGH-IN 1/2-INCH

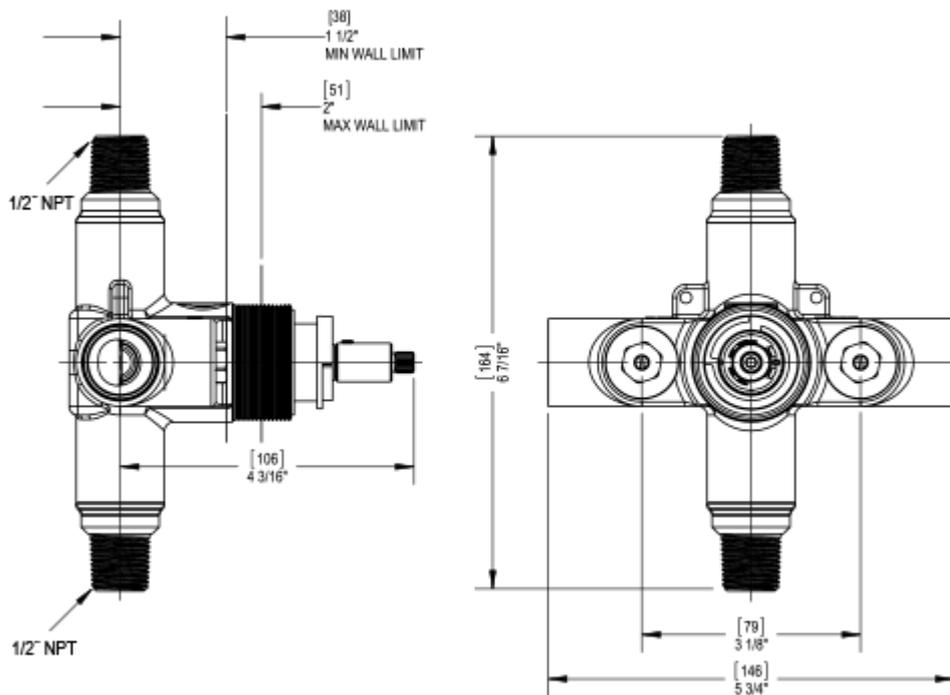

Critical Dimensions