

**FEATURES:**

- Brass construction
- Quarter-turn ceramic disk cartridges
- Flow Rate  
Tub : 7 gpm @ 50 psi  
Shower : 7 gpm @ 50 psi


**APPROVAL:**

- AB1953 / NSF61
- ASME A 112.18.1
- CSA B125.1

170704

THE **Rubinet** FAUCET COMPANY**ASSEMBLY INSTRUCTION****2AR000 / 2AR100**

THREE VALVE TUB &amp; SHOWER ROUGH-IN

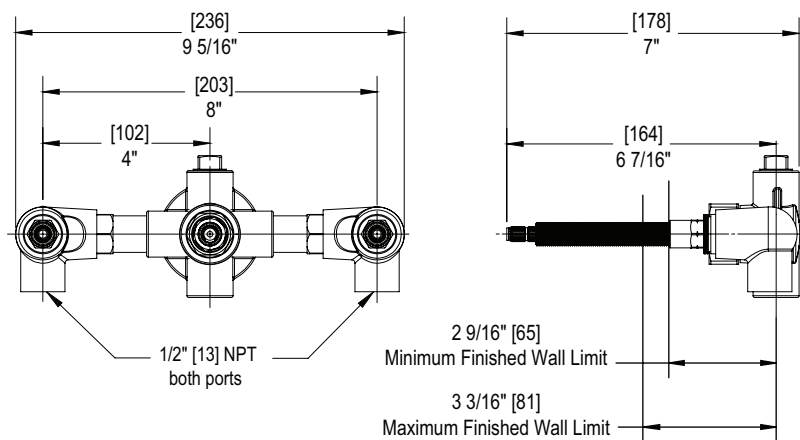

**2AR000**  
**2AR100**



**CONTACT US:**

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit [www.rubinet.com](http://www.rubinet.com)

**REMOVAL OF FIXTURE:**


Always turn the water supply off before removing the existing fixture or disassembling a valve. Open all fixture handles to relieve water pressure and to ensure that the water has been successfully turned off.

1

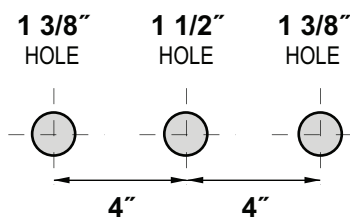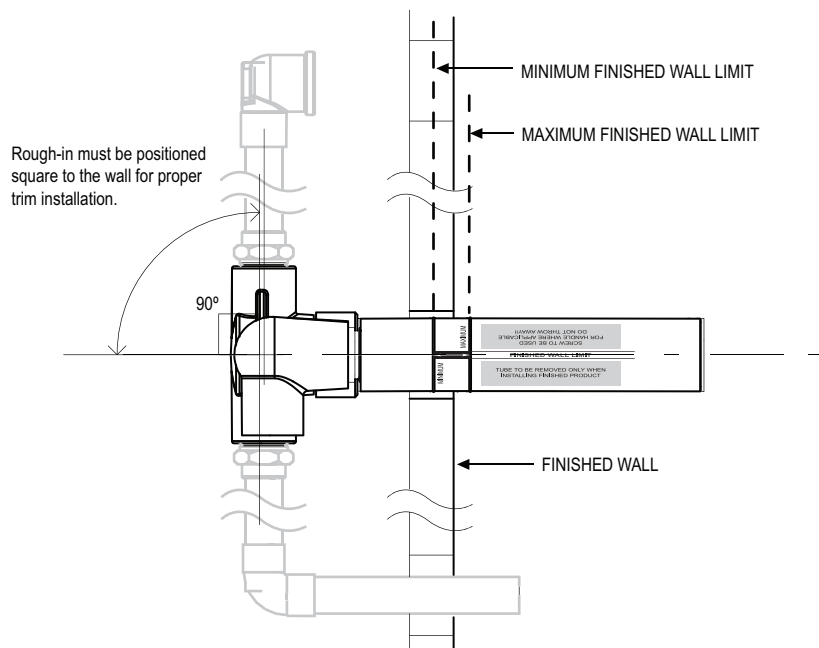

**\* PROTECTIVE COVER MUST NOT BE REMOVED WHEN PLASTERING AND/OR TILING.**

2

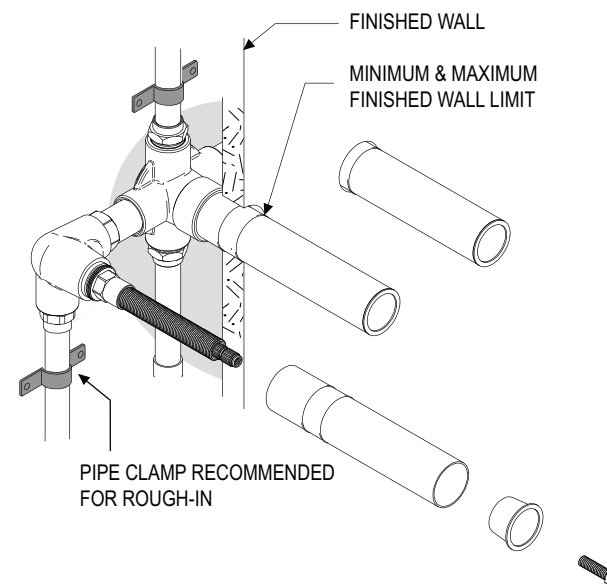

**\* IF PEX PIPING IS TO BE USED, DO NOT USE PEX WITH A DIAMETER OF LESS THAN 3/4". SMALLER DIAMETER PIPING AND FITTINGS WILL CAUSE STACKING IN THE SHOWER OUTLET.**