



FEATURES:

- Brass construction
- Quarter-turn ceramic disk cartridges
- Flow Rate : 8.0 gpm @ 50 psi

APPROVAL:

- AB1953 / NSF61
- ASME A 112.18.1
- CSA B125.1

171005

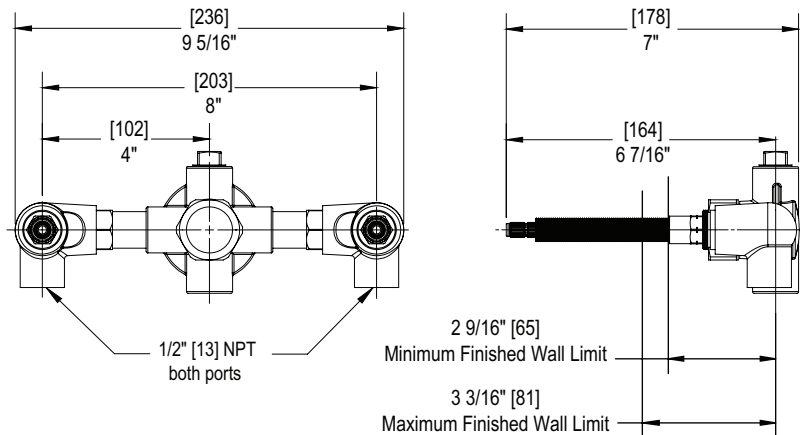THE **Rubinet** FAUCET COMPANY**ASSEMBLY INSTRUCTION****3AR000 - 3AR100****TWO VALVE TUB FILLER ROUGH-IN**

3AR000
3AR100

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com

REMOVAL OF FIXTURE:



Always turn the water supply off before removing the existing fixture or disassembling a valve. Open all fixture handles to relieve water pressure and to ensure that the water has been successfully turned off.

CARE OF FIXTURE:

The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.



1

Rough-in must be positioned square to the wall for proper trim installation.

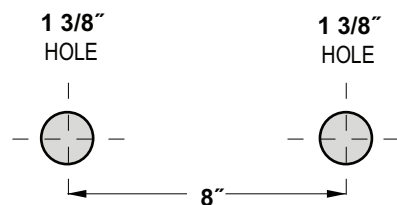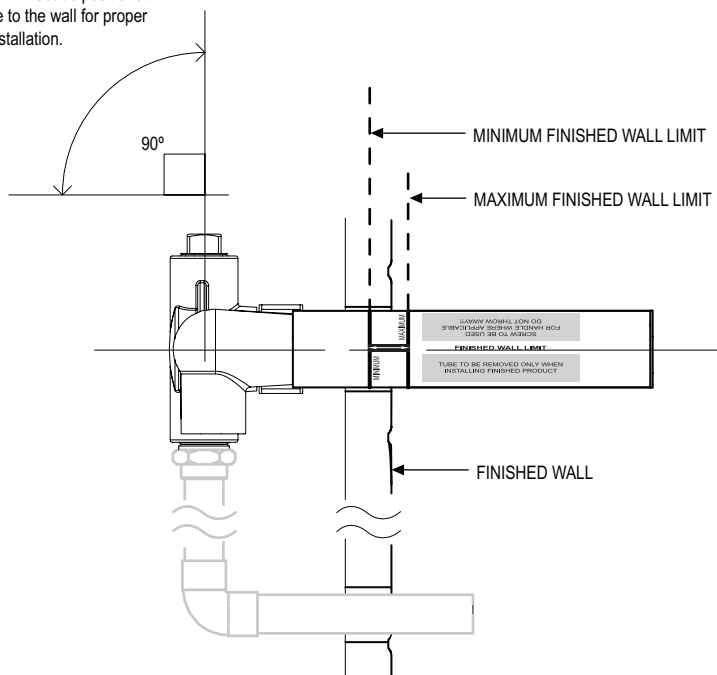

* PROTECTIVE COVER MUST NOT BE REMOVED WHEN PLASTERING AND/OR TILING.

2

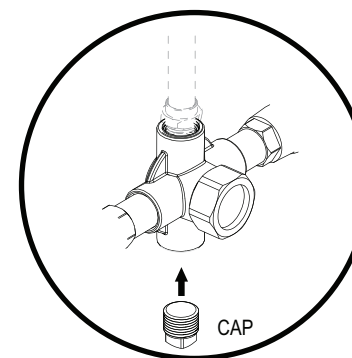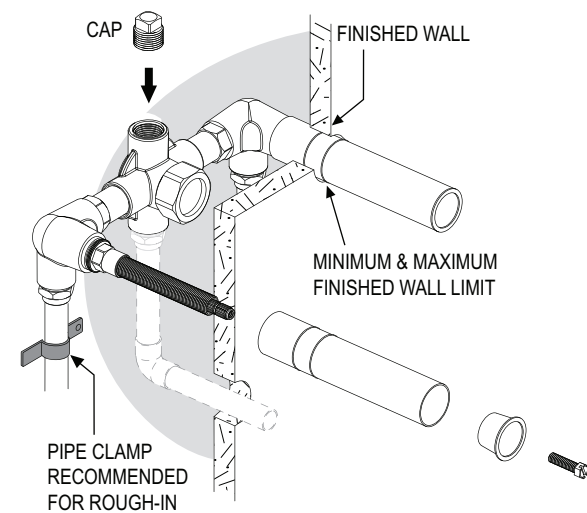

BOTH TOP & BOTTOM PORTS CAN BE USED