


FEATURES:

- Brass construction
- Shut-Off Volume Control Valve
- Mixer control
- Factory preset at 38°C (100.4°F)
- Temperature range from 15°C (59°F) to 60°C (140°F)
- Safety stop with override function
- Flow Rate 4SR100 / 4SR000 (1/2") : 7.0 gpm @ 50 psi
- 4SR300 / 4RR000 (3/4") : 10.0 gpm @ 50 psi

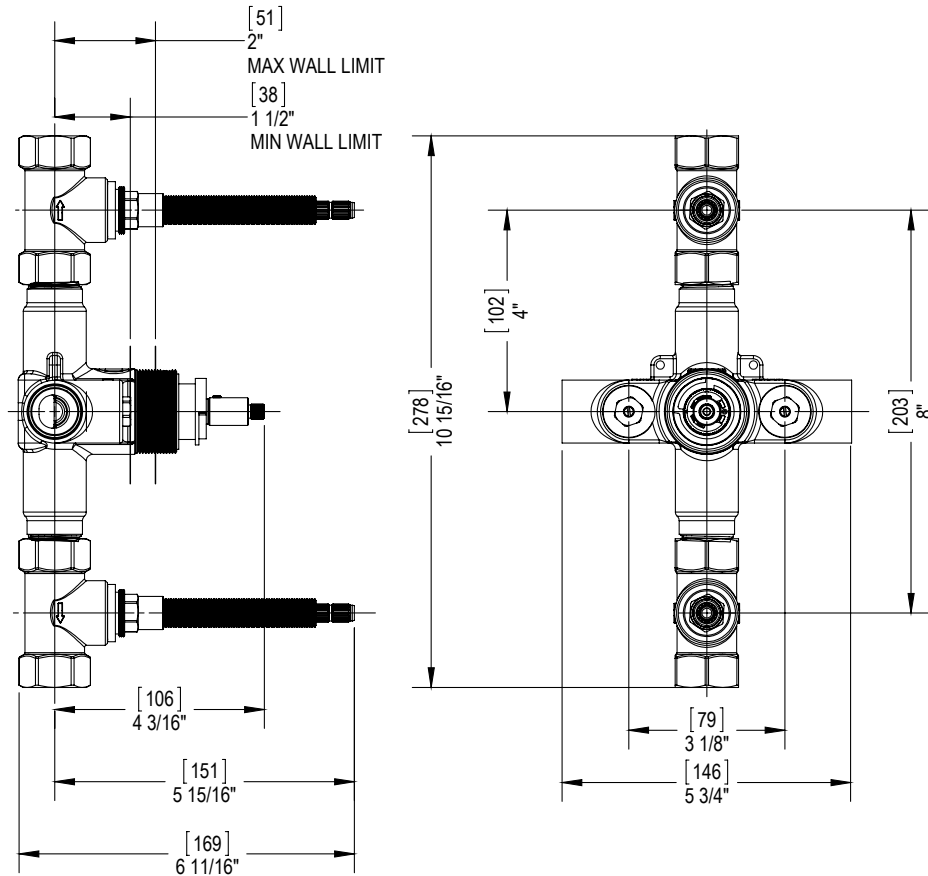

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com


170704

THE **Rubinet** FAUCET COMPANY

ASSEMBLY INSTRUCTION

4SR100 (4SR000) / 4SR300 (4RR000)

TEMPERATURE CONTROL VALVE WITH BUILT-IN STOPS & VOLUME CONTROL VALVE ROUGH-IN

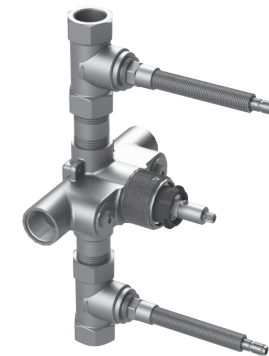


4SR100 (1/2")
4SR000 (1/2")

4SR300 (3/4")
4RR000 (3/4")

REMOVAL OF FIXTURE:

Always turn the water supply off before removing the existing fixture or disassembling a valve. Open all fixture handles to relieve water pressure and to ensure that the water has been successfully turned off.


1

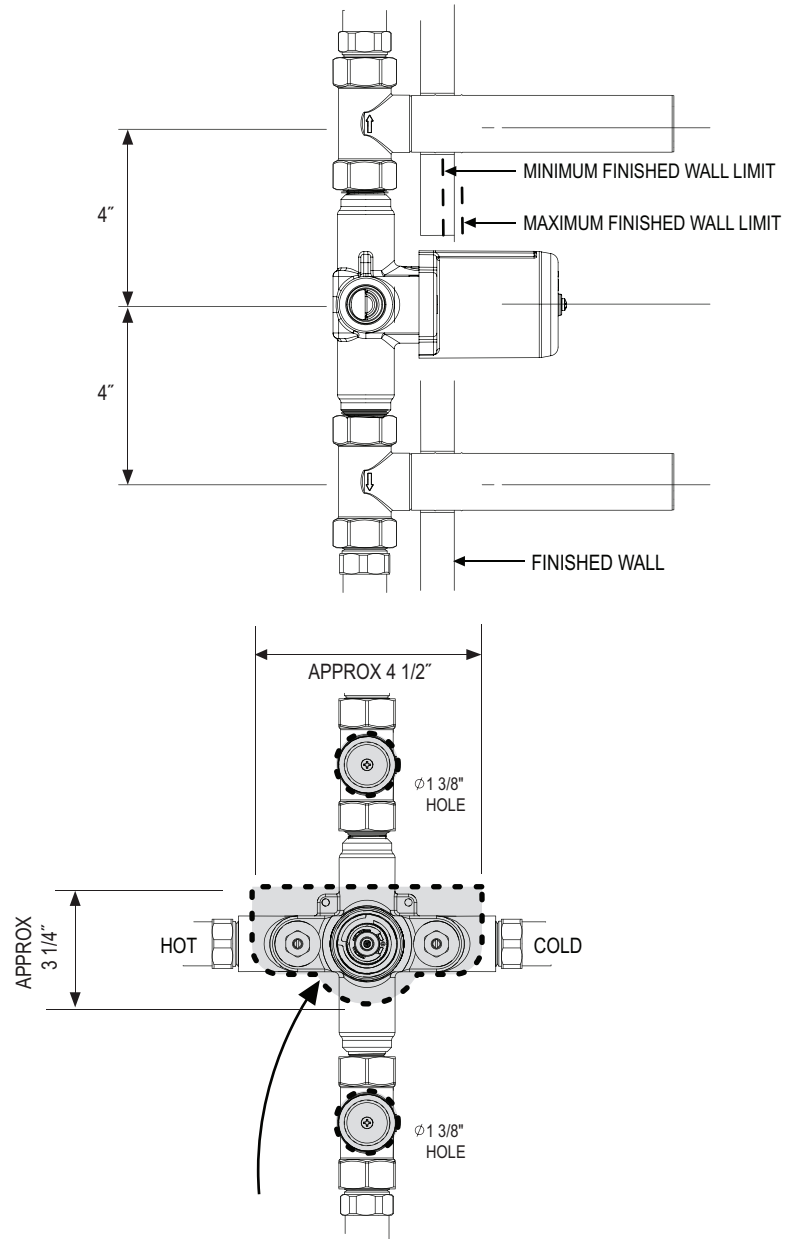

**LEAVE OPENING FOR ACCESS TO STOPS
WHEN CUTTING THE WALL TILES**

PROTECTIVE COVER **MUST NOT BE REMOVED** WHEN PLASTERING AND/OR TILING.

2

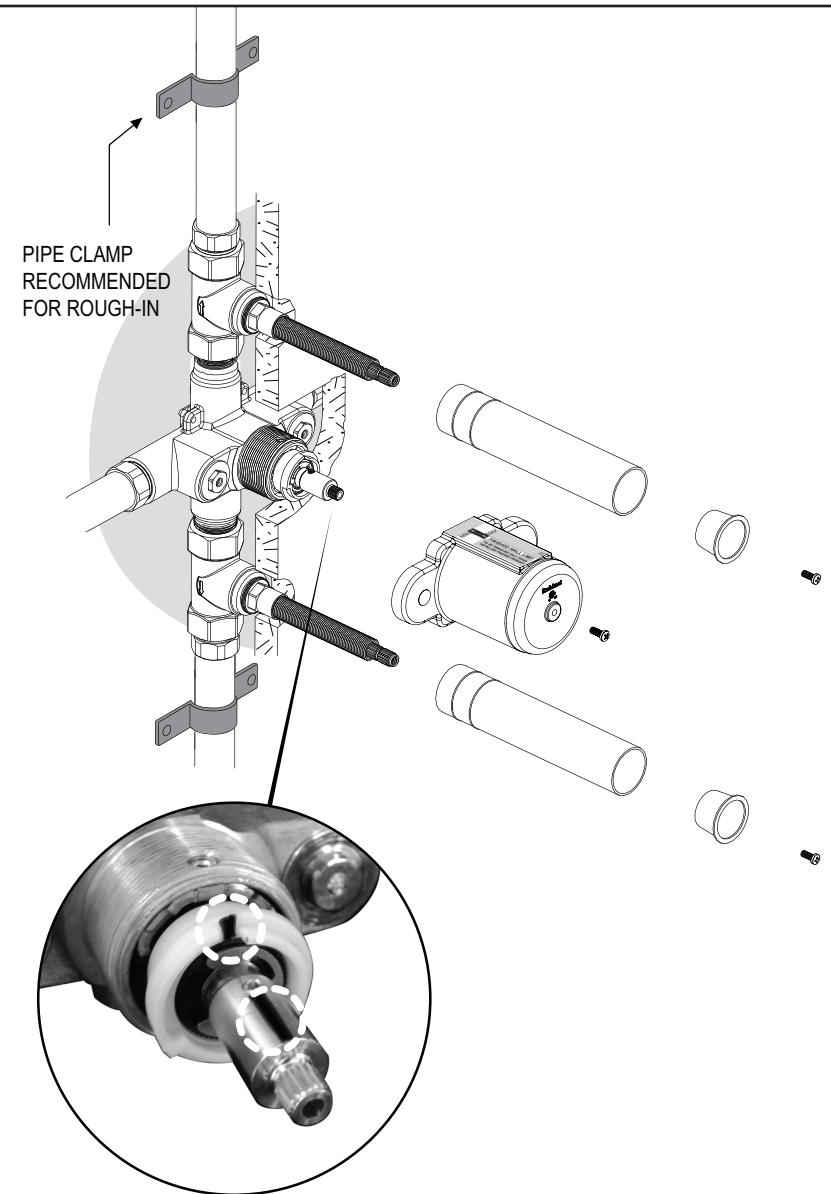

FACTORY CALIBRATED POSITION
(at 38°C / 100°F)

Red marks should be aligned
at 12 O'Clock position

*** IF PEX PIPING IS TO BE USED, DO NOT USE PEX WITH A DIAMETER
OF LESS THAN 3/4" FOR MAXIMUM FLOW FROM THE VALVE**