

SOCKETS & ACCESSORIES

18F-2Z-C1 8 Blade Terminal Sockets DIN-Rail or Screw Mounting



Electrical Ratings: 10A @ 250V


Wiring: 1 or 2, solid or stranded, 16-30 AWG

Termination: Plus-minus screw (M3x8) with pressure plate. Tighten to recommended torque of 5.2 in-lb (maximum 6.9 in-lb)


Temperature:

Operating, -25° C to 85° C (-13° F to 185° F);
Storage, -40° C to 85° C (-40° F to 185° F)

Approximate Weight: 0.07 lb (32 g)

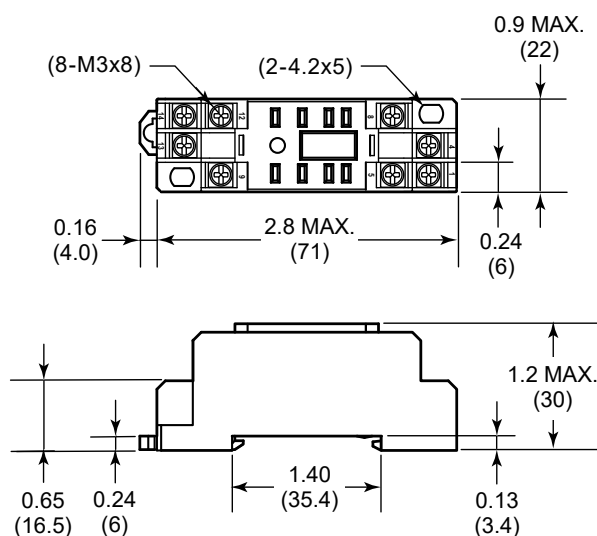

Dimensions in Inches (Millimeters)

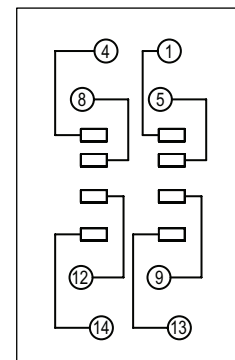


Wiring Diagram 369

If using retainer clips, only *one* is recommended opposite the Push-to-Test button.

Approvals:



18F-3Z-C1 11 Blade Terminal Sockets DIN-Rail or Screw Mounting

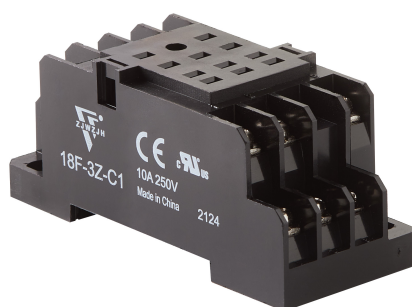

Electrical Ratings: 10A @ 250V


Wiring: 1 or 2, solid or stranded, 16-30 AWG

Termination: Plus-minus screw (M3x8) with pressure plate. Tighten to recommended torque of 5.2 in-lb (maximum 6.9 in-lb)


Temperature:

Operating, -25° C to 85° C (-13° F to 185° F);
Storage, -40° C to 85° C (-40° F to 185° F)

Approximate Weight: 0.10 lb (45 g)

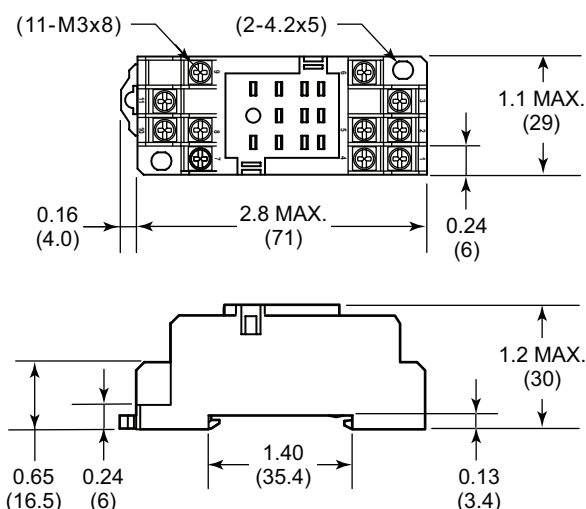

Dimensions in Inches (Millimeters)

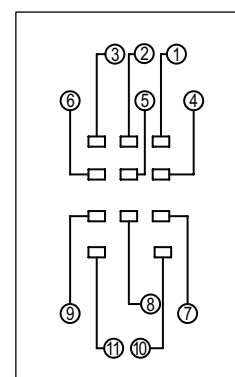

Wiring Diagram 370

If using retainer clips, only *one* is recommended opposite the Push-to-Test button.

Approvals:

