

C.P. VALVES WITH COMPACT HAMMER ARRESTER


Specifications for Valves with Compact Hammer Arrester

- Forged brass and copper total nickel plated
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Piston type (permanently sealed chamber) arrester
- Copper body chamber with brass cap & brass piston, AA size
- Maximum temperature: 180 °F (82 °C)
- Maximum pressure: 250 psi (17.5 kgf/cm²)
- Absorptive capacity: 150 psi (10.5 kgf/cm²)
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807, F1690, ANSI/NSF 61, ANSI/NSF 372, ANSI/NSF 14 PDI WH201, ASSE 1010




**COMPACT
HAMMER**


Certified by
IAPMO (cUPC)

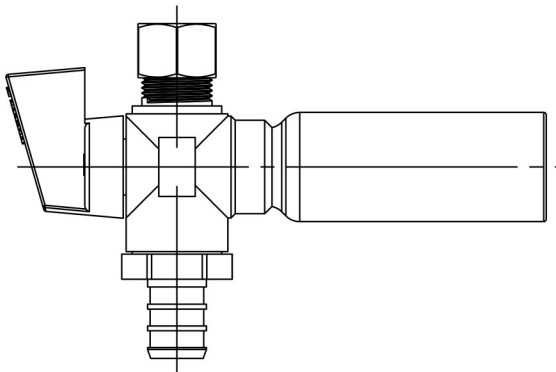


31548 1/2" PEX x 3/8" O.D.

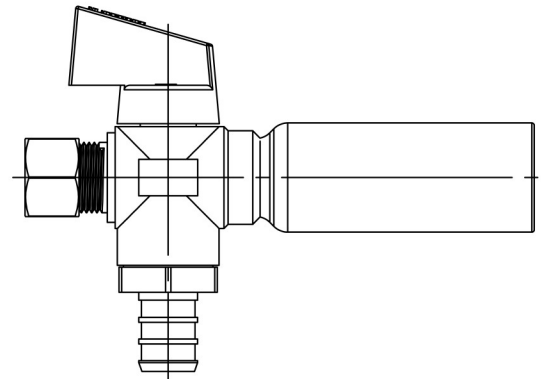

31549 1/2" PEX x 3/8" O.D.

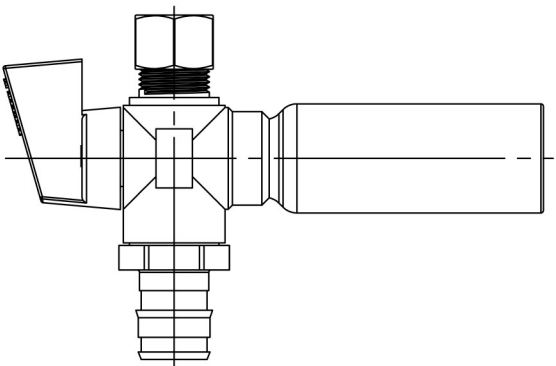

31558 1/2" EXP. x 3/8" O.D.

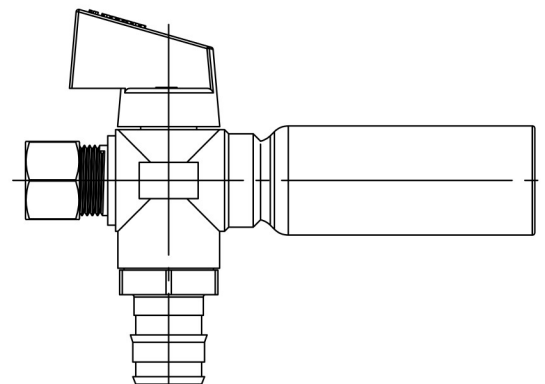

31559 1/2" EXP. x 3/8" O.D.