

Features

- Ergonomic pull-out spray with toggle button, 2-mode spray: regular stream and spray
- Solid zinc construction
- Ceramic disc cartridge
- Nylon flexible supplies
- 360° swivel spout
- 1524 mm (60") nylon hose with ball joint
- Integral check valves
- Single hole installation
- Quick installation system

Colors (Finishes)

- Chrome: KF1836-110
- Stainless Steel PVD*: KF1836-130
- Matte black: KF1836-160

* PVD finish: Physical Vapour Deposit

Maximum flow rate

- 6.8 L/min (1.8 gpm)

Certifications

The specified model meets or exceeds the following standards;



CSA B125.1
ASME A112.18.1
ICC A117.1



LeadFree




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details.**

Product dimensions:

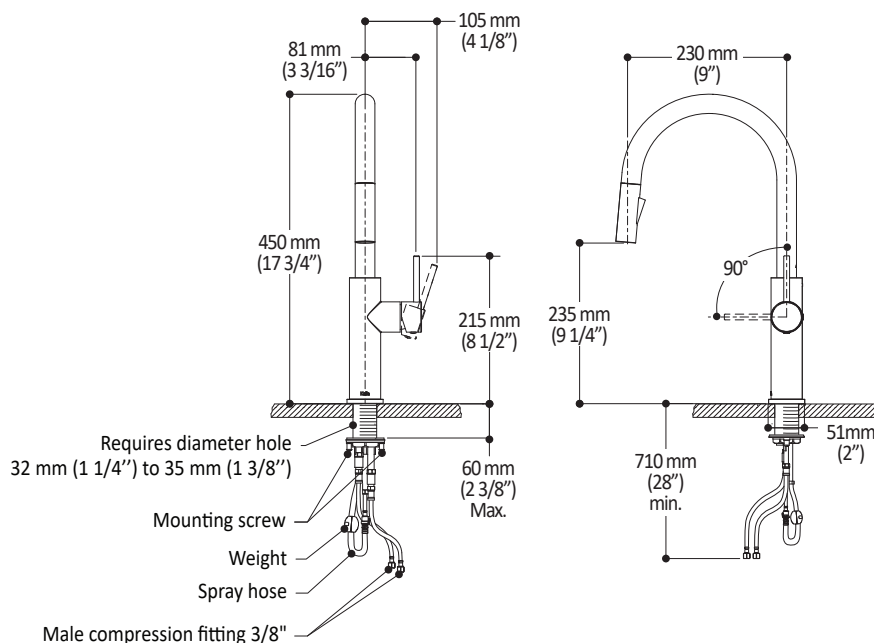

Important: Dimensions are approximated and are subject to changes. Please refer to the installation instructions.