


# SOCKETS & ACCESSORIES

## SR3ZC3 Octal (Round) 11 Pin Sockets DIN-Rail or Screw Mounting




- ◆ Tighten terminal screws to recommended torque of 5.31 in-lb
- ◆ Approximate weight: 0.12 lb (56 g)

**Approvals:** UL/cUL, CE, RoHS compliant

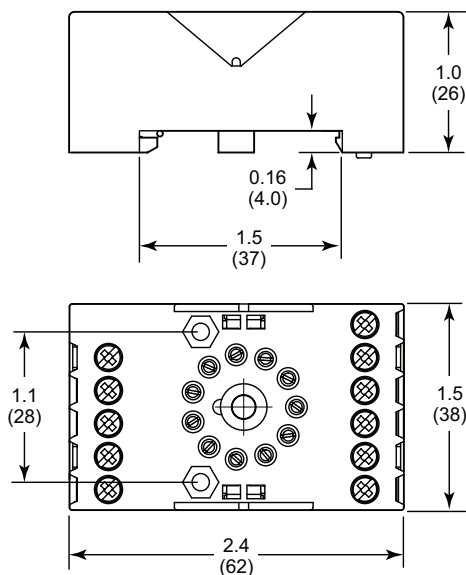

Dimensions in Inches (Millimeters)

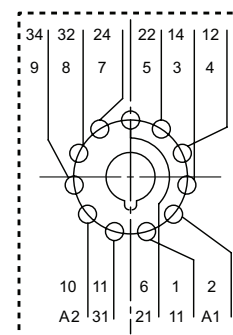


Wiring Diagram

## GB-PR Retainer (Plastic) For use with GB Series Blade Relay/Sockets



GB-PR Retainer  
(Ordered Separately)

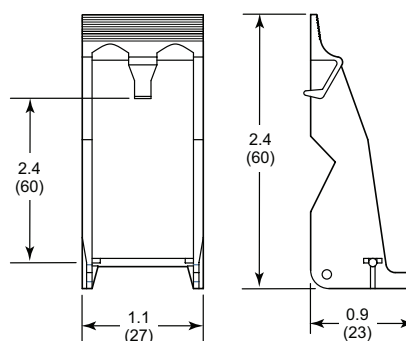


Dimensions in Inches (Millimeters)




Retainer on GB120A4 Relay  
and SB4ZC5 Socket

## GR-MR Retainer (Metal) For use with GR Series Octal Relay/Sockets

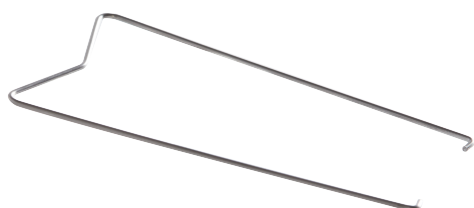

GR-MR Retainer  
(Ordered Separately)



Retainer on GR120A2w Relay  
and SR2ZC3 Socket