

# PROGRAMMABLE MULTI-FUNCTION | MULTI-RANGE

## TE-881 SERIES



- ◆ 10 field-selectable functions in one unit
- ◆ Universal Control voltage : 12-240V AC/DC
- ◆ 0.1 second - 10 days programmable time delay
- ◆ 15A SPDT output contacts
- ◆ LEDs indicate output relay status & timing mode
- ◆ Compact 17.5mm enclosure mounts on 35mm DIN track
- ◆ Pilot duty rating




Better. By Design.

**800.238.7474**

[WWW.MACROMATIC.COM](http://WWW.MACROMATIC.COM)

[SALES@MACROMATIC.COM](mailto:SALES@MACROMATIC.COM)











The TE-881 Series time delay relays offer 10 timing functions and a universal voltage input (12-240V AC/DC) with a programmable time range from 0.1 second – 10 days all in one compact unit. Choose between versions with 15A SPDT or DPDT output contacts. A green LED indicates control voltage applied; a red LED blinks during timing and is steady when the output relay is energized. These products have a compact 17.5mm enclosure which snaps on to 35mm DIN rail. This conserves space and reduces installation time, which saves money. With all this flexibility, the TE-881 Series replaces hundreds of separate time delay relays.

CATALOG NUMBER		TE-8816U	TE-8812U
Input			
Voltage Range	12-240V AC/DC, 50/60Hz	12-240V AC/DC, 50/60Hz	
Operating Range	-15% of 12V, +10% of 240V	-15% of 12V, +10% of 240V	
Burden	3VA (AC), 1.7W (DC)	3VA (AC), 1.7W (DC)	
Output			
Configuration	SPDT	DPDT	
Rating	15A @ 240V AC 1/3HP @ 120V AC, 3/4HP @ 240V AC, B300		
Minimum Switching	100mA @ 5V AC or 5V DC		
Contact Material	Silver Alloy		
Life	10 million operations mechanical; 70,000 electrical		
Timing			
Number of Functions	10 (see descriptions on Page 44)		
Time Ranges	8 different time ranges built-in:		
	100 ms - 1 Sec.	0.1 - 1 Hr.	
	1 - 10 Sec.	1 - 10 Hr.	
	0.1 - 1 Min.	0.1 - 1 Day	
	1 - 10 Min.	1 - 10 Days	
Repeat Accuracy	±0.2%		
Setting Accuracy	5%		
Reset Time	150ms maximum		
Trigger Pulse Length	50ms maximum		
Other			
Mounting	35mm DIN Rail only		
Agency Approval	 (File #E109466)		
Temperature	Storage: -30° to 70° C (-22° to 158° F) Operating: -20° to 55° C (-4° to 131° F)		
LED Indication	Green-Control voltage ; Red-Timing or Relay ON		
Terminations	14 AWG (2.5mm²)		

# PROGRAMMABLE MULTI-FUNCTION | MULTI-RANGE

## TE-881 SERIES

### FUNCTIONS


FUNCTION	DIAL SETTING	GRAPH	FUNCTION	DIAL SETTING	GRAPH
ON DELAY	<b>A</b>		REPEAT CYCLE * (ON 1ST)	<b>F</b>	
REPEAT CYCLE * (OFF 1ST)	<b>B</b>		PULSE GENERATOR (PULSE=0.5 SEC)	<b>G</b>	
INTERVAL	<b>C</b>		ONE SHOT	<b>H</b>	
OFF DELAY	<b>D</b>		ON/OFF DELAY *	<b>I</b>	
RETRIGGERABLE ONE SHOT (Watchdog)	<b>E</b>		MEMORY LATCH (Latching Relay)	<b>J</b>	

\* Note: ON & OFF times are the same.

### CONNECTION DIAGRAMS




TE-8816U  
SPDT

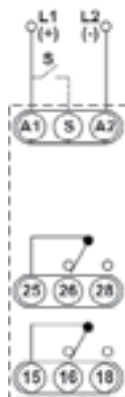

TE-8812U  
DPDT

### DIMENSIONS

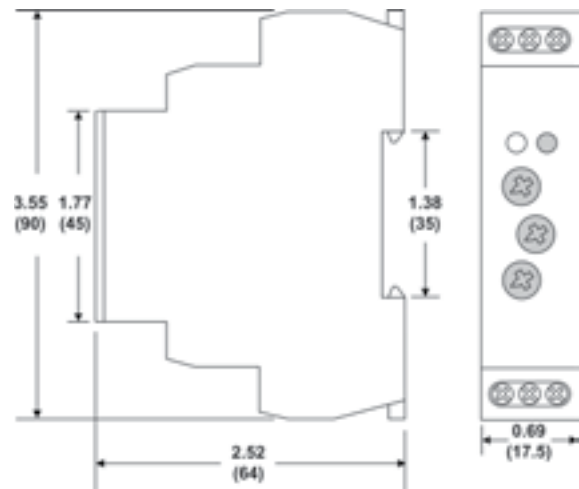

All Dimensions in  
Inches (Millimeters)

TIME DELAY RELAYS | 17.5MM