

FIG. 150T

200 WOG BRASS SWING CHECK VALVE T-PATTERN NPT END





Features:

- Valves conform to: MSS SP-80, Type 2
- Threaded Ends per ANSI B1.20.1


Performance Rating:

- The Max .Working Pressure 200PSI
- Working Temperature 32°F - 212°F

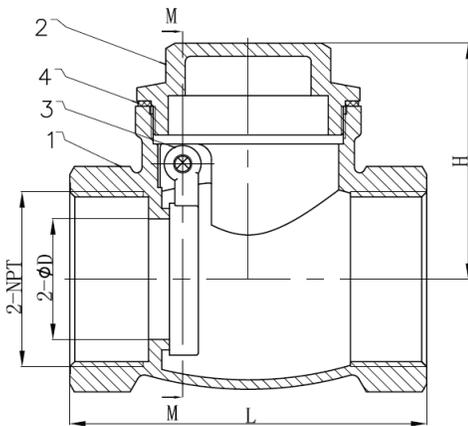

Material List:

| NO. | Part Name | QTY | Material |
|-----|-----------|-----|------------------|
| 1 | Body | 1 | ASTM B283 C37700 |
| 2 | Bonnet | 1 | Brass |
| 3 | Disc | 1 | Brass |
| 4 | Washer | 1 | Fiber |
| 5 | Pin | 1 | Brass |
| 6 | Bolt | 1 | Brass |



M-M Section view

Dimensions: (mm)

| SIZE | ØD | L | H |
|--------|------|--------|--------|
| 1/2" | 13 | 50.00 | 35.0 |
| 3/4" | 18.5 | 56.00 | 39.50 |
| 1" | 23 | 68.00 | 45.00 |
| 1 1/4" | 21 | 75.00 | 53.50 |
| 1 1/2" | 36 | 80.00 | 59.50 |
| 2" | 48 | 95.00 | 66.00 |
| 2 1/2" | 56 | 118.00 | 81.50 |
| 3" | 76 | 140.00 | 90.00 |
| 4" | 96 | 160.00 | 109.00 |