



B-5C-LF

5.10

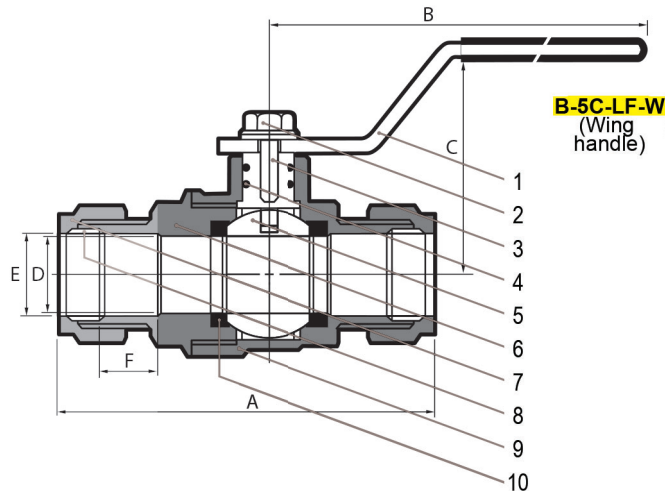

OPTIONS

B-5C-LF-W
(Wing handle)




- Forged 2 piece construction
- Full port
- **Compression ends for use with type K L & M copper tube**
- Blowout-proof stem
- Chrome plated ball
- Class 150, 600 WOG (1/2" & 3/4")
500 WOG (1")

**NSF/ANSI 61 drinking water
system components**
NSF/ANSI 372 lead free
(0.25% max lead content)

B-5C-LF PART/MATERIAL		
NO.	PART NAME	MATERIAL
1	Lever	Steel ASTM A36
2	Lever Screw	Steel ASTM A36
3	Stem	Brass ASTM DS-561 C28500AB
4	O Ring	NBR NSF Approved
5	Ball	Brass ASTM DS-561 C28500AB Chrome Plated
6	Cap	Brass ASTM DS-561 C28500AB
7	End Nut	Brass ASTM B283-C37700
8	Ferrule	Brass ASTM C27200
9	Body	Brass ASTM DS-561 C28500AB
10	Seats	PTFE
11	Wing Handle	Steel Zinc Plated

B-5C-LF DIMENSIONS								
Size (mm/in)	A	B	C	D	E	F	CV	Weight lb/kg
1/2	73.7	91.5	45.2	14.9	15.93	12.7	15	0.6
	2.90	3.60	1.78	0.59	0.627	0.50		0.28
3/4	87.1	91.5	48.5	20	22.35	13.9	30	0.85
	3.43	3.60	1.91	0.79	0.880	0.55		0.39
1	100.3	126.5	52.5	25	28.65	16	60	1.30
	3.95	4.98	2.07	0.98	1.128	0.63		0.59

PRESSURE TEMPERATURE RATING

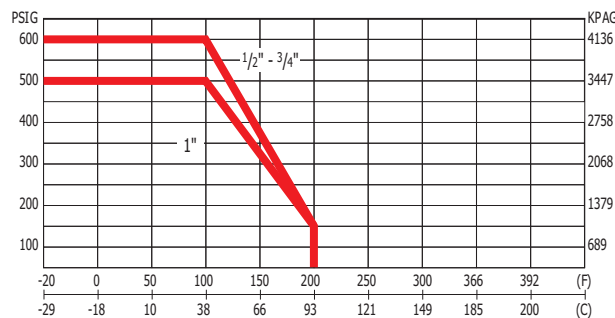

***NOTES:**

- Compression end limits below;
- 300 PSIG @ 15F to 160F (-9.4C to 71C)
- 150 PSIG @ 200F (93C)