

Careguard®

Laminar Stream - 1.5 gpm

Flow Restricted Regular Size




Features and Benefits

- ▶ With built-in Agion® antimicrobial product technology.
- ▶ Provides a splash-free crystal clear (non-aerated) stream.
- ▶ Saves water and energy.
- ▶ Unique screenless Cascade® construction hinders lime build up.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF®-61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense

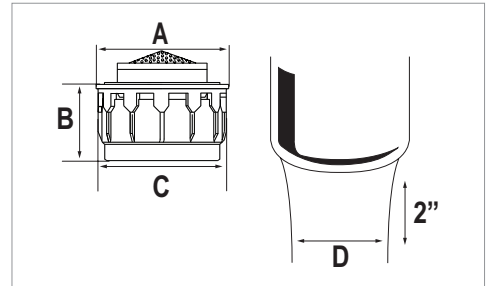

Dimensions

No	mm	In
A	20.93	.823
B	11.95	.470
C	20.00	.787
D	≈ 13	≈ 1/2

Housings






Technical Data

Materials: Body Acetal with Agion®
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.181 testing requirements.



Thread & Part Number

Part #	Designation	Thread Size
12 035	Insert only	
12 000	Regular male	15/16"-27
12 010	Regular female	55/64"-27
12 020	Regular dual thread	15/16"-27 x 55/64"-27
12 004	Vandal proof regular male	15/16"-27
12 014	Vandal proof regular female	55/64"-27
12 026	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.


Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Ring	Basket
Light Gray	Light Gray	Light Gray

Flow Rate Curve

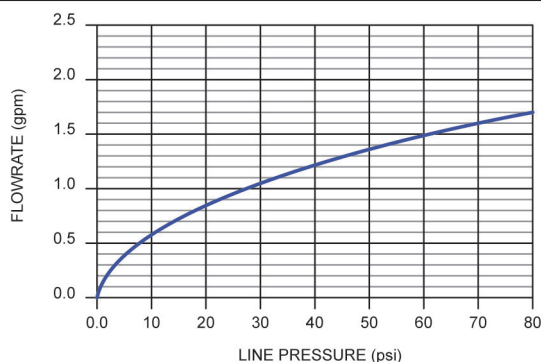

NEOPERL, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com