

PCA® Perlator® Coin Slot Faucet Aerator - 1.2 to 1.5 gpm Pressure Compensating Regular Size 15/16"-27



Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate & stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ With built-in 15/16"-27 male threads to thread directly into the cavity of a traditional regular male aerator (no housing needed to connect).
- ▶ Install with a coin (quarter recommended).
- ▶ Virtually invisible once installed.

Certifications

ANSI/NSF®-61-372
ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements

WaterSense

Complies with CEC Amendment to CCR Title 20, section 1605.3 (1.2 gpm)



Options Available

Part #	Color	gpm	L/min
16 045	Pink / Gray	1.2	4.5
16 016	Green / Gray	1.5	5.7
11 913	Red Service Key [Service Key Optional]		

Packaging:

Threaded Insert


1 pc (bag), 6 pcs (bag), 50 pcs (bag)




Technical Data

Materials:	Body	Acetal
	Washer	NBR
	O-ring	EPDM

Continuous




Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.




Dimensions

Mounting Dimensions

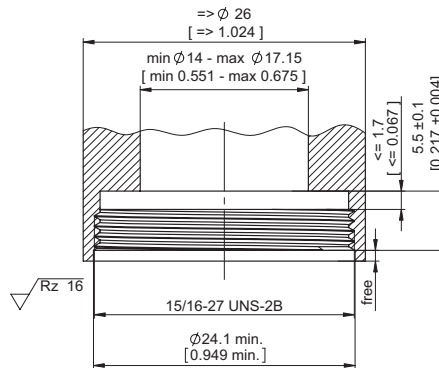

Dimensions

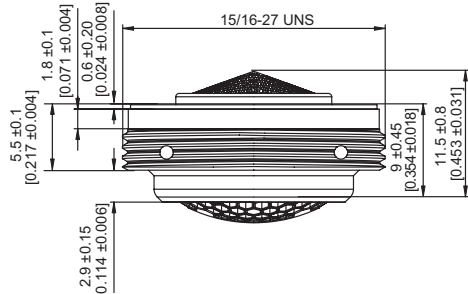

- Also available with M24 male threads
The aerator grooves should be used for production assembly, not the coin slot.

ATTENTION!

MAXIMUM MOUNTING TORQUE

1 Nm steadily applied

Refer to SAS-1 for further assembly instructions.