

PCA® Spray Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size



Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF®-61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
10 235	Insert only	
10 200	Regular male	15/16"-27
10 210	Regular female	55/64"-27
10 220	Regular dual thread	15/16"-27 x 55/64"-27
10 204	Vandal proof regular male	15/16"-27
10 214	Vandal proof regular female	55/64"-27
10 226	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Lime Green	Light Gray

Flow Rate Curve

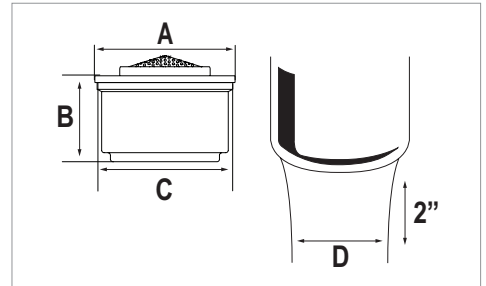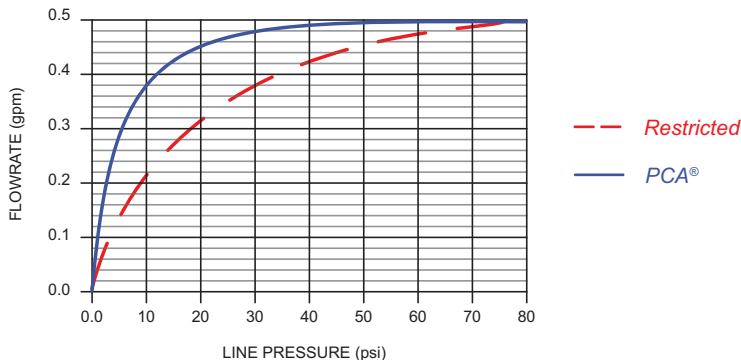

Dimensions

No	mm	In
A	20.85	.821
B	13.00	.512
C	19.95	.785
D	≈ 25	≈ 1


Housings




Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous



Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.



NEOPERL, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com