

Drifter

STJU289


Composition

100% recycled polyester

Printing guide

Screen print	● ● ●	Waterbase / Plastisol Need special inks for low curing temperature. polyester can cause a colour migration: Blocking layer is recommended. Our specific recommendations for this product : Low temperature Poly ink in addition to a grey blocker to avoid migration and problems with the seams becoming shine.
Discharge	○ ○ ○	Not applicable
Transfer - DTF, Flock, Flex, Screen Transfer, ...	● ● ●	Follow transfer supplier instructions. Use type of glue adequate for max 130°C. Anti-migration needed. Not recommended : DTF Classic (no blocker) due to high risk of polyester migration. Steam after press to limit shiny marks.
Direct To Garment	○ ○ ○	Not applicable
Embroidery	● ● ●	Direct embroidery, stitched patch, loop labels...

○ ○ ○ Not applicable ● ○ ○ Not recommended ● ● ○ Acceptable ● ● ● Excellent

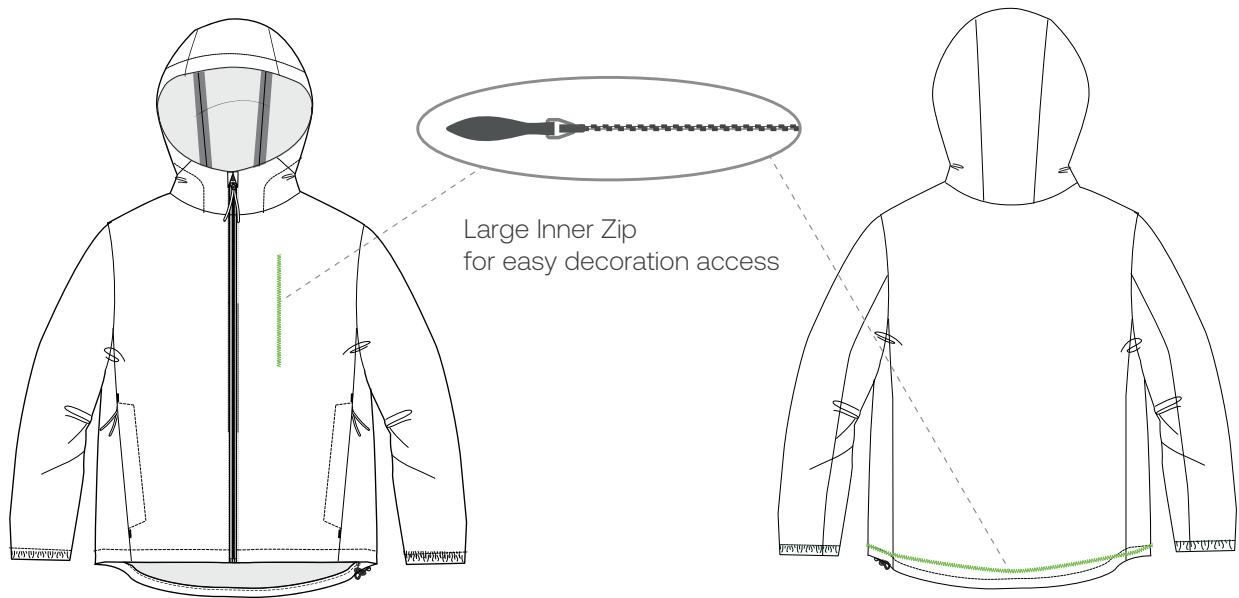

→ [More information on our website](#)

STANLEY/STELLA