




PRODUCT PROFILE

Zebra® Belt Skimmer is a Traditional Favorite

- Steel, heavy-duty construction
- Removable, easy-to-clean oil collection tray
- Continuous-duty, fan-cooled motor
- Self-tensioning belt on fixed lower pulley (to 24")
- Hanging lower pulley design (36" and up)
- Dual wiper set with lifetime warranty
- One year warranty all other parts (except steel belts)
- Accessories shown below

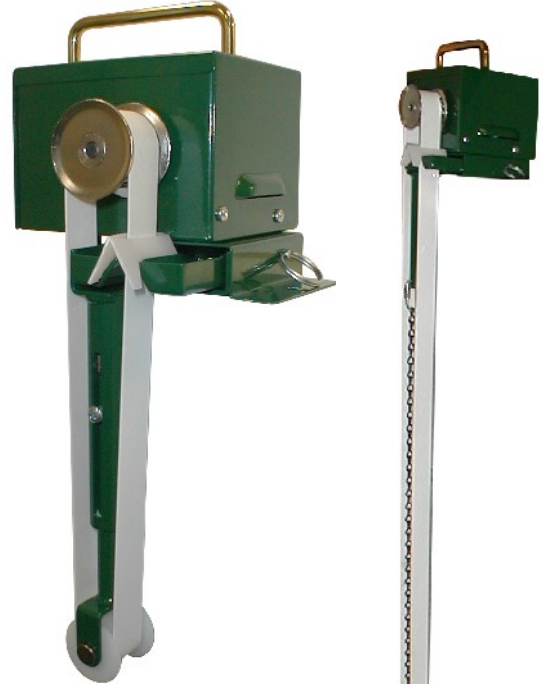

Belt Skimmer, Diverter™ and Lockjaw™ shown here



NEW

Outboard Motor Shaft for longer steel belt life in chemically aggressive applications

Model	Part Number*	Belt Type	Fluid Max Temp	Capacity	Belt Reach	Belt Width	Required Access
Belt Skimmer	BPF1-08	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	8" (20cm)	1" (25mm)	2" (50mm)
	BPF1-12	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	12" (30cm)	1" (25mm)	2" (50mm)
	BPF1-18	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	18" (45cm)	1" (25mm)	2" (50mm)
	BPF1-24	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	24" (60cm)	1" (25mm)	2" (50mm)
	BPF2-08	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	8" (20cm)	2" (50mm)	4" (10cm)
	BPF2-12	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	12" (30cm)	2" (50mm)	4" (10cm)
	BPF2-18	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	18" (45cm)	2" (50mm)	4" (10cm)
	BPF2-24	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	24" (60cm)	2" (50mm)	4" (10cm)
	BSF1-08	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	8" (20cm)	1" (25mm)	2" (50mm)
	BSF1-12	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	12" (30cm)	1" (25mm)	2" (50mm)
	BSF1-18	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	18" (45cm)	1" (25mm)	2" (50mm)
	BSF1-24	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	24" (60cm)	1" (25mm)	2" (50mm)
	BSF2-08	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	8" (20cm)	2" (50mm)	4" (10cm)
	BSF2-12	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	12" (30cm)	2" (50mm)	4" (10cm)
BSF2-18	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	18" (45cm)	2" (50mm)	4" (10cm)	
BSF2-24	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	24" (60cm)	2" (50mm)	4" (10cm)	

*115v motors standard; 220v motors available by adding "E" to end of part number.

*Outboard motor shaft available for steel belt units by replacing the "S" in the part number with "Z".

*Longer reach units available in 1' increments by changing suffix of part number (-36, -48, -60, etc.)

Accessories

BGST4	Diverter, oil/water separator for pure oil discharge (raises unit by 2", please account for when selecting reach)
BGX2	Lockjaw Mounting Clamp affixes skimmer to any 1/4" thick wall or barrel, making portability simple
XETIMER	Timer, 24 hour, 3 settings per day, 110v plugs to any standard outlet
XETIMER-GSBZ	Integrated Timer, 7 day, 2 hour interval settings, integrated within motor housing



To determine required reach, measure from mounting point to low fluid operating level

Zebra Skimmers Corporation
 PO Box 833 Chagrin Fall, OH 44022 USA
 www.ZebraSkimmers.com
 www.CoolantMaintenance.com
 Phone: 1-440-349-0141
 Toll Free: 1-888-249-4855
 Fax: 1-440-349-1211

©December 2008 Zebra Skimmers Corp. All rights reserved.

Contact your Zebra distributor for more information.