

## DS-K5671-ZH Face Recognition Terminal

DS-K5671-ZH face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.



### Available Model

DS-K5671-ZH

### Features

- Compatible with Hikvision turnstile
- Communicates with the third-party turnstile via IO output or Wiegand
- Water-proof
- 7-inch LCD touch screen
- 2 MP wide-angle dual lens
- Adjustable supplement light brightness
- Face recognition distance: 0.3 m to 3 m
- High performance processor with deep learning algorithm
- Face capacity: 50,000
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- Multiple authentication modes
- Applies pictures to the device via TCP/IP or uploading them to the device via the USB flash drive
- Stand-alone operation
- Transmits and saves the comparison results and the captured pictures to the client software or others
- Device management, log search, and parameter settings via the device.
- Connects to one external card reader via RS-485 protocol
- Connects to Wiegand card reader via Wiegand protocol




- Remote live view via RTSP protocol; encoding mode: H.264
  - Voice prompts
  - Two-way audio with client software, indoor station, and master station
  - NTP, manually time synchronization, and auto synchronization
  - Watchdog design for protecting the device and ensuring device running properly
  - Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
  - Supports multiple languages: English, Spanish, Arabic, Thai, Indonesian, and Russian
  - Supports EHome 5.0 (ISUP 5.0), and ISAPI protocol
  - Configuration via web browser
- \* **Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes**

## Specifications

Model	DS-K5671-ZH
Face recognition distance	0.3 m to 3 m
Face recognition duration	< 0.2 s
Face anti-spoofing	Support
Face capacity	50,000
Event capacity	100,000
Screen	7-inch touch screen
Camera	2 MP dual-lens camera
Communication	TCP/IP, Wi-Fi
Interface	LAN × 1, RS-485 × 1, Wiegand × 1, USB × 1, IO output × 1, IO input × 2, lock × 1, door contact × 1
Audio prompt	Support
Two-way audio	Support
Power supply	12 VDC/2 A
Working humidity	0 to 90% (no condensing)
Working temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Protection level	Indoors use

\* *Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger).*

## Dimensions

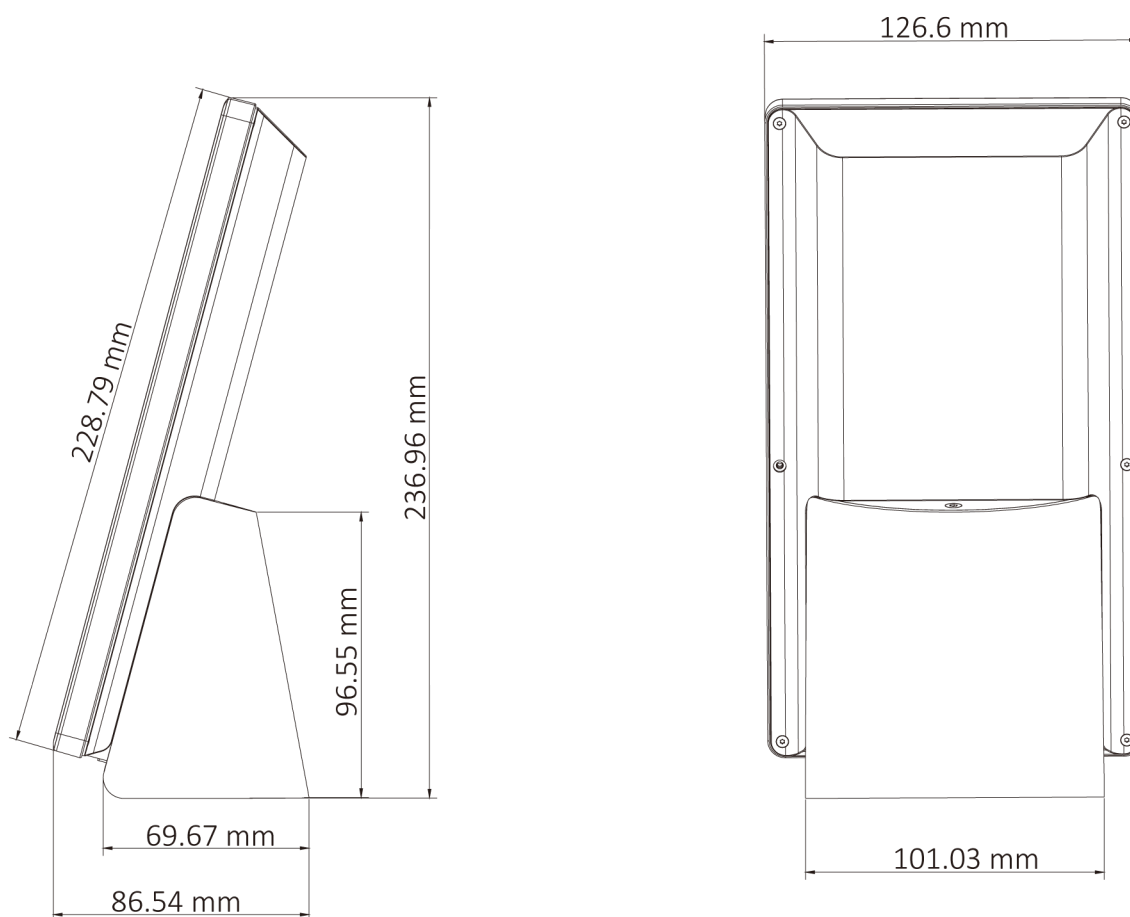

## Accessory



DS-KAB5671-S



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com