

DS-K5671-ZU Face Recognition Terminal

DS-K5671-ZU face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.



Available Model

DS-K5671-ZU

Features

- Compatible with Hikvision turnstile
- Communicates with the third-party turnstile via IO output or Wiegand
- Water-proof
- 7-inch LCD touch screen
- 2 MP wide-angle dual lens
- Adjustable supplement light brightness
- Face recognition distance: 0.3 m to 3 m
- High performance processor with deep learning algorithm
- Face capacity: 50,000
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- Multiple authentication modes
- Applies pictures to the device via TCP/IP or uploading them to the device via the USB flash drive
- Stand-alone operation
- Transmits and saves the comparison results and the captured pictures to the client software or others
- Device management, log search, and parameter settings via the device.
- Connects to one external card reader via RS-485 protocol
- Connects to Wiegand card reader via Wiegand protocol




- Remote live view via RTSP protocol; encoding mode: H.264
 - Voice prompts
 - Two-way audio with client software, indoor station, and master station
 - NTP, manually time synchronization, and auto synchronization
 - Watchdog design for protecting the device and ensuring device running properly
 - Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
 - Supports multiple languages: English, Spanish, Arabic, Thai, Indonesian, and Russian
 - Supports EHome 5.0 (ISUP 5.0), and ISAPI protocol
 - Configuration via web browser
- * **Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes**

Specifications

Model	DS-K5671-ZU
Face recognition distance	0.3 m to 3 m
Face recognition duration	< 0.2 s
Face anti-spoofing	Support
Face capacity	50,000
Event capacity	100,000
Screen	7-inch touch screen
Camera	2 MP dual-lens camera
Communication	TCP/IP, Wi-Fi
Interface	LAN × 1, RS-485 × 1, Wiegand × 1, USB × 1, IO output × 1, IO input × 2, lock × 1, door contact × 1
Audio prompt	Support
Two-way audio	Support
Power supply	12 VDC/2 A
Working humidity	0 to 90% (no condensing)
Working temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Protection level	IP65

* *Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger).*

Dimensions

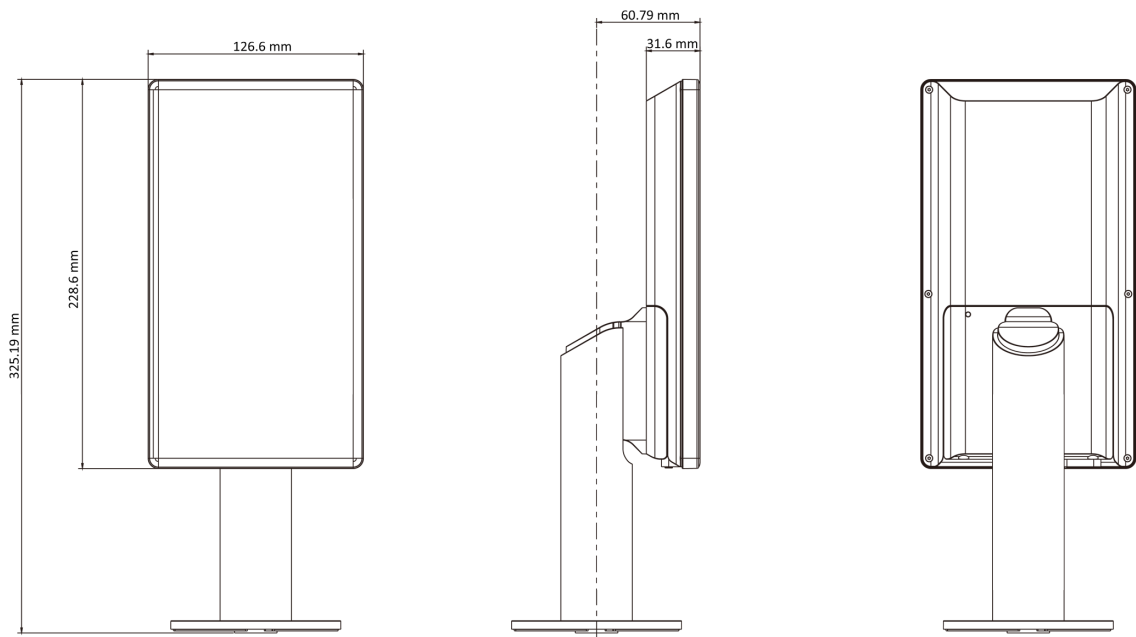

Accessory



DS-KAB5671-S

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com