

# Renton 650 USB

Compatible with your lifestyle

PN: UPLI-LI065RE-CG01B  
EAN: 6422956008673

## Specifications

<b>Capacity</b>	650 VA / 360 W
<b>Type</b>	Line Interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	170-280 VAC
Frequency Range	60/50 Hz (auto sensing)
<b>Output</b>	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz
Transfer Time	Typical 4 ms
Waveform (Batt. Mode)	Simulated Sine Wave
<b>Indicators type</b>	
AC Mode	Green lighting
Battery Mode	Green flashing every 10 seconds
<b>Low Battery</b>	Green flashing every second and red lighting
<b>UPS Fault</b>	Red lighting
<b>Over-temperature</b>	Red flashing every 0.5 second
<b>Alarm</b>	
Battery Mode	Sounding every 10 seconds
Low Battery	Sounding every second
Overload	Sounding every 0.5 seconds
Fault	Continuously sounding
<b>Protection</b>	
Outlets type	3x Schuko Battery Backup 2 x USB 2.0 (2.4A max)
Full protection	Overload, Discharge & Overcharge protection
Humidity	0-90 % RH @ 0-40°C (non-condensing)
Noise level	Less than 40dB



3 Schuko Outlets with Protection



Auto-Restart



Automatic Voltage Regulation

- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Compact size with local receptacles for easy use
- Simple and easy installation & operation
- USB charger

## Battery

Battery Type & Number	1x GP05121F PN: BTVACEUOATF2FCN01B
Typical Recharge Time	6-8 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 18 min 50% Load - 6 min 75% Load - < 2 min 100% Load - < 1 min




## Physical

Product dimensions	240 x 158 x 91.5 mm
Product weight	3.83 kg



## Running time on battery

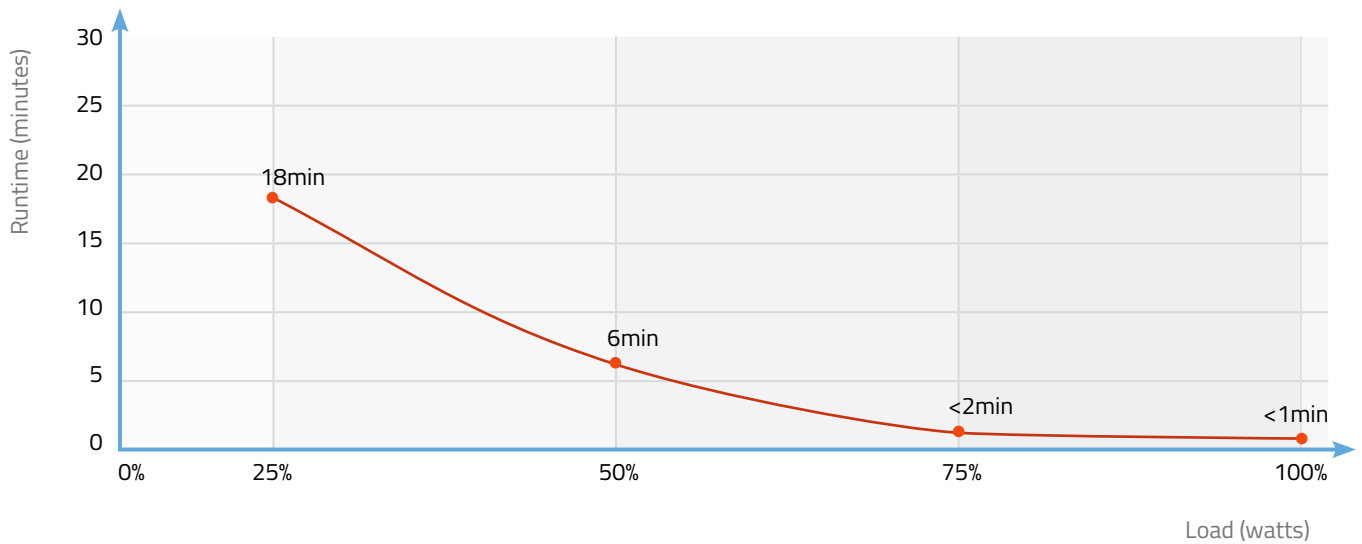

## Logistics

Carton Box Size (LxHxW)	441 x 241 x 290 mm
Pieces in the Carton Box	3 pcs / ctn
Net & Gross weight / CTN	N.W. / G.W.: 11.49 kg / 12.9 kg



## Certificates

