



M-5794 1

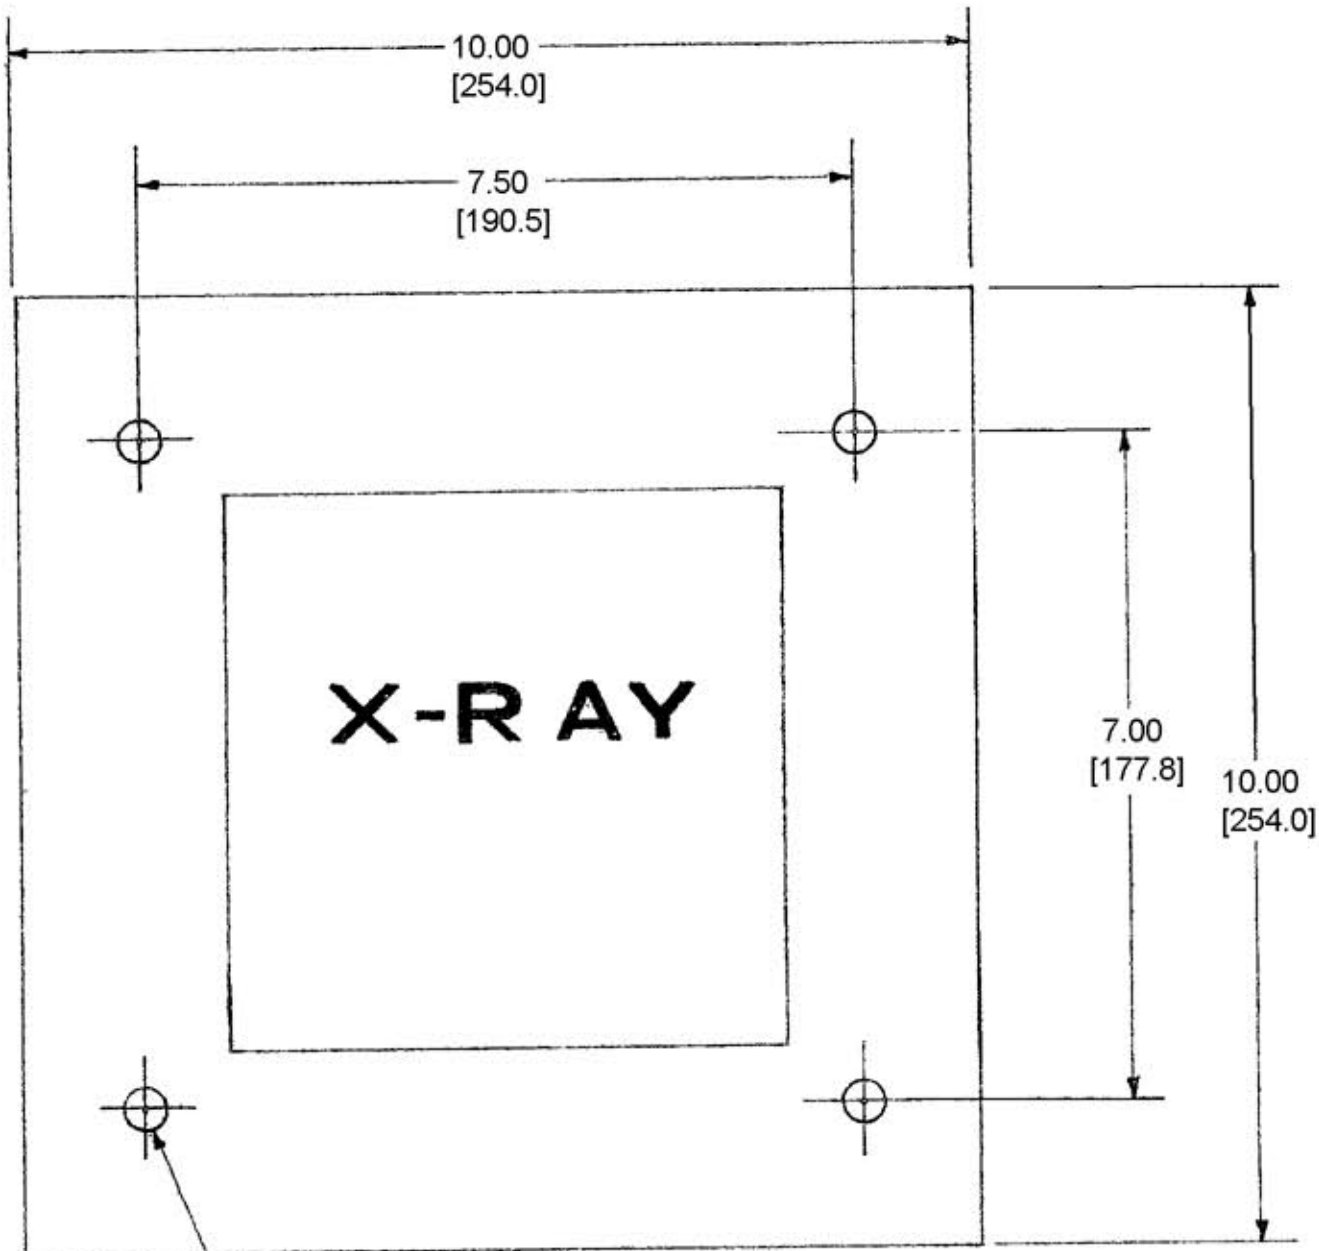

4X Ø .265  
[6.7]

NOTES:  
1. ALL DIMENSIONS TO BE IN INCHES.  
[mm]

3X #6 AWG COPPER WIRE  
12" LONG

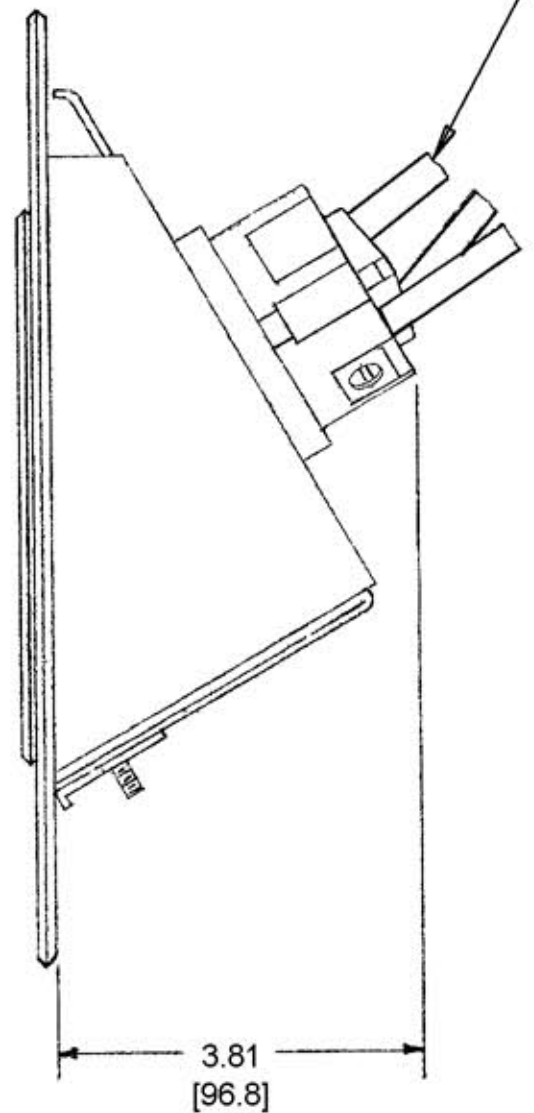

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
OUTLET MOUNT	.062 C.R.S.	GRAY ENAMEL
RETAINER	.062 C.R.S.	ZINC PL.
SHROUD	ALUM.	
FACE PLATE	.043 ST. STL.	
DOOR	.037 ST. STL.	
ROD	.083 ST. STL.	
PLUNGER	NYLON	
CLIP	.043 ST. STL.	
COMPRESSION SPRING	.024 WIRE	CAD. PL.
BARREL	BRASS	NICKEL PL.
LEAD WIRE		1-GREEN 2-BLACK
SCREW-RD. HD.	STEEL	ZINC PL.
SCREW-TRUSS HD.	ST. STL.	
INSULATORS	DUREZ	BLACK
CONTACT SPRINGS	.040 COP.	
GR. SHUNT	.020 BRASS	
CLAMPS	ALUM.	1-GREEN
CENTER POST	STEEL	ZINC PL.
AUX. SPRING	.020 BRONZE	
COIL SPRING	.055 ST. WIRE	COP. PL.
CASING	.025 BRASS	ZINC PL.

SYM	REVISIONS	APP	DATE
1	ADDED NOTE 1; HBL25505 WAS 25505; ADDED COPPER WIRE CALL-OUT; CONVERTED ALL DIMS. TO DECIMAL & METRIC; REVISED TITLE PER DCN 11902 RCM	JPP	1/21/05

DIMENSION SHEET FOR CAT. NO. HBL25505

REPAIRABLE  NON-REPAIRABLE

B

M-5794

1

TITLE  
50A 250VAC , 2 POLE, 3 WIRE  
MOBILE X-RAY HUBBELLOCK  
RECEPTACLE & COVER PLATE  
WITH DOOR

TOLERANCES UNLESS  
OTHERWISE SPECIFIED  
FRACTIONS ± 1/64  
DECIMALS ± .005  
ANGLES ± 2°

HARVEY HUBBELL, INC.  
BRIDGEPORT, CONN.  
DR. BY S.K. APP. BY \_\_\_\_\_  
TR. BY \_\_\_\_\_ SCALE HALF  
CHK'D BY \_\_\_\_\_ DATE 10-3-74