


5657-2GY



Color:  Gray

UPC Code: 07847778968

Country Of Origin: Mexico

**Eligible for ARRA funded projects > \$7,443,000*



5657-2GY

Brand Features

Decora Plus devices combine designer styling with all the benefits of rugged Commercial Grade construction. The robust product offering includes: single pole, double pole, 3 and 4-way switches, momentary and maintained contact switches, as well as pilot light and illuminated switches.

Item Description

15 Amp, 120/277 Volt, Decora Plus Rocker Double-Throw Ctr-OFF Momentary Contact Single-Pole AC Quiet Switch, Commercial Spec Grade, Self Grounding, Back & Side Wired, - Gray

Technical Information

AC Horsepower Ratings

Max. Amperage: 12 Amp

HP Rating: 1/2HP-120V 2HP-240V-277V

Electrical Specifications

Dielectric Voltage: Withstands 1500V for 1 minute

Grounding: Self Grounding

Overload UL20 Test: 100 cycles of OL at 4.8 times rated current

Temperature Rise: Maximum 30 degrees C rise

Voltage: 120/277 Volt

Amperage: 15 Amp

Endurance: 30,000 cycles minimum

Environmental Specifications

Operating Temperature: -40°C to 65°C

Flammability: Rated V-2 per UL94

Material Specifications

Strap Material: Steel

Body Material: Thermoplastic

Color: Gray

Actuator Material: Thermoplastic

Mechanical Specifications

Product ID: Stamped on Strap

Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd

Terminal Accom.: 14-#10 AWG back wired; #14-#12 AWG side wired

Torque Range: 12-14 inch pounds

Product Features

Grounding: Self Grounding

Voltage: 120/277 Volt

Color: Gray

HP Rating: 1/2HP-120V 2HP-240V-277V

Feature: Double-Throw Ctr-OFF Momentary Contact

Standards and Certifications

CSA C22.2 No. 111: File #152105

Warranty: 10 Year Limited


UL Standard: UL 20

ANSI: C-73

NOM: 057


NEMA: WD-1 & WD-6

Dimensional Diagram

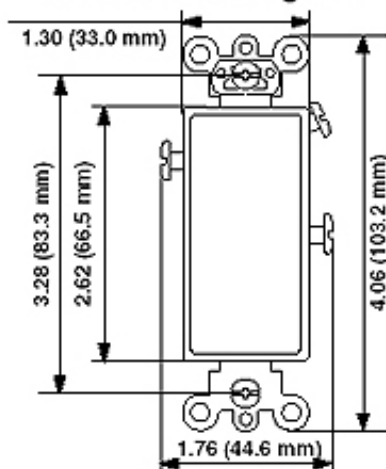

Wiring Diagram

Single-Pole, Double Throw
(SPDT) Center OFF

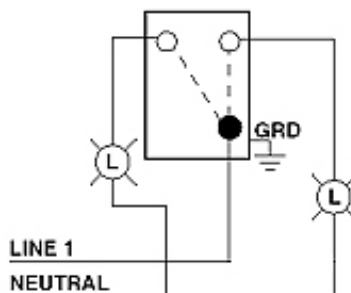

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2012 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/



**Leviton is the smart choice, providing the most comprehensive range of solutions to meet the needs of today's residential, commercial and industrial buildings. Leveraging more than a century of experience, Leviton helps customers create sustainable, intelligent environments through its electrical wiring devices, network and data center connectivity solutions, and lighting energy management systems. From switches and receptacles, to daylight harvesting controls, networking systems, and equipment for charging electric vehicles, Leviton solutions help customers achieve savings in energy, time and cost, all while enhancing safety.*