


Updating the SW Series Luxul to EasyIP config:

Download the config file for the switch from the LegrandAV.com web site.

Log into the Luxul SW Series switch and go to Maintenance -> Configuration -> Restore

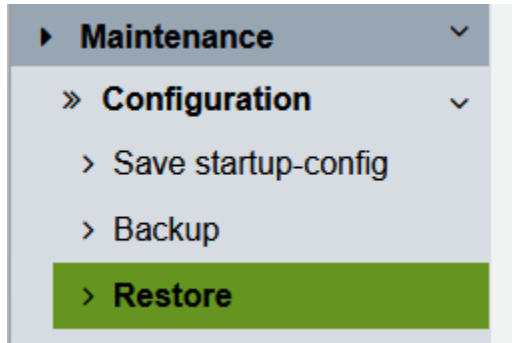

Select Browse and choose the config file that was downloaded earlier.

Select running-config and replace.

Place a check in the box for Skip signature verification.

Click the Restore button.

Restore Configuration

Source File		Browse...	SW-615-24P-R-EasyIP
Destination File			
File Name	Parameters		
<input checked="" type="radio"/> running-config	<input checked="" type="radio"/> Replace	<input type="radio"/> Merge	
<input type="radio"/> startup-config			
<input type="radio"/> Create new file	<input type="text"/>		
<input checked="" type="checkbox"/> Skip signature verification			
<input type="button" value="Restore"/>			

Click OK to confirm skip signature verification.

192.168.0.4

Are you sure you'd like to skip signature verification ?

OK

Cancel


The file will upload.

Processing...

Please be patient while the configuration is loaded.

The configuration file has been successfully uploaded.

After the file is successfully uploaded save it to the running-config using the save icon in the top right corner of the screen.

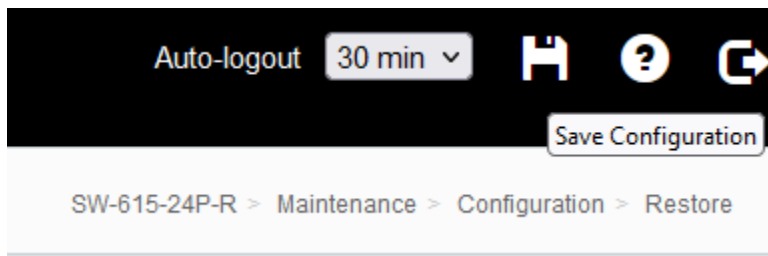

192.168.0.4

Would you like to save the running-config to the startup-config? This will overwrite the current startup-config.

OK

Cancel

After the configuration upload is complete, the IP address will be the default for the switch (see label on bottom of switch) and the user name/password will be admin/admin.