



# Installation instructions for STELLAR IP65 LED Batten

<b>Model No</b>	<b>19997/08</b>	<b>19998/08</b>
<b>Wattage</b>	<b>20W</b>	<b>40W</b>

Before first using your new Brilliant LED Batten it is most important that you read and follow these instructions, even if you feel you are quite familiar with this type of product. Retain this document for future reference.

**THIS FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN**



### Specifications:

- Fitting : IP65 Fixed LED luminaire with PC body and diffuser.
- Rated Supply Voltage: 240V AC, 50Hz.
- Maintained LED Power: 20W (19997/08), 40W (19998/08).
- Photometrics: 1600lm (19997/08), 3200lm (19998/08), 4200K (Cool White)
- Lamp type: LED.
- Protection Class : Class I.
- Ingress Protection: IP65 (Resistant to dust and water).
- Fixing: Surface mounted. Intended to be used while fastened to a support.
- Dimming: Non Dimmable.

### Dimensions:

Model	Length (mm)	Width (mm)	Height (mm)
19997/08	660	100	73
19998/08	1260	100	73

### For Your Safety, please read this instruction manual carefully before installation:

- Installation, repair and/or inspection must be conducted by qualified personnel in accordance with Australian Standards and local Building codes.
- Do not install in a position where the fixture can be easily accessed by children or infirm persons.
- Do not perform modification to the fixture.
- Do not touch the fixture when switched on.
- This fixture is not dimmable.
- Failure to follow these instructions will void the warranty.

### Environmental Protection:

This electrical product should not be disposed as normal waste. Please always recycle! Check with your Local Council about your recycle options.



# Installation instructions for STELLAR IP65 LED Batten

Model No	19997/08	19998/08
Wattage	20W	40W

Figure 1

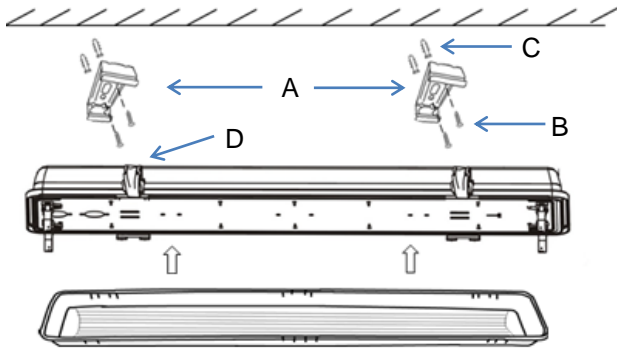


Figure 2

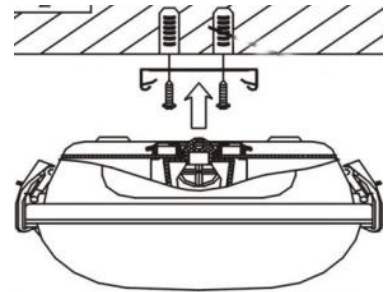


Figure 3

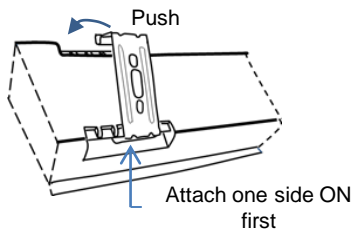


Figure 4




Figure 5





Figure 6



## Installation Instructions:

1. Ensure mains supply is switched OFF.
2. Unpack the fixture and accessories carefully and place on a flat surface.
3. Drill holes into the mounting surface using brackets (A) as a template.
4. Secure the two brackets (A) to the mounting surface using screws (B). Rawl plugs (C) need to be used for concrete mounting surface (Figure 1).
5. Attach the fixture onto the mounting brackets by sliding one side of the base onto the bracket, then pushing the other side on firmly (Figure 3).
6. Unfasten diffuser locking clips (D) on one side of the fixture and let the diffuser hang down (Figure 1).
7. Turn the retainer (Figure 4) to the 'Open' position and remove the metal reflector/heat sink.
8. Using one of the three knockouts on the fixture, drill a hole and attach a IP65 cable gland (M20 Cable gland provided in the gift box).
9. Run mains wire through the cable gland (Figure 5) into the fixture and connect the Live (L), Neutral (N) and Earth according to the markings on the terminal block in accordance with Australian Standards. Make sure the connections are firm and secure.
10. Refit the metal reflector/heatsink and turn retainer until it locks firmly.
11. Ensure cable gland is tightened sufficiently in order to prevent water ingress.
12. Install diffuser (A), by aligning it correctly with the base and fasten clips (E) (Figure 6).
13. Turn the power on.



## Installation instructions for STELLAR IP65 LED Batten

<b>Model No</b>	<b>19997/08</b>	<b>19998/08</b>
<b>Wattage</b>	<b>20W</b>	<b>40W</b>

### Warranty:

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 3 years from date of purchase. This warranty is only valid for products installed and operated within the guidelines specified by Brilliant Lighting, and within the correct operating voltage ranges as stated on the product's rating label.

Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, incorrect installation, service by unqualified or unauthorised personnel or lack of regular maintenance and cleaning. Proof of installation by qualified personnel may be required, e.g. Electrical Safety Certificate. Proof of purchase must be supplied with all warranty claims.

This warranty is provided in addition to any other rights and remedies of the customer under any law. In applications not intended for household, personal or domestic use, liability is limited to replacement or reimbursement of product only. Brilliant Lighting does not warranty the costs of removal or re-installation of this product or associated components.

*Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.*

Any claim under this warranty must be made within 3 years from date of purchase of this product. To make a claim under the warranty; at your own expense take the product (with proof of purchase – receipt or similar) to the store where you purchased the product or contact Brilliant Lighting at the address below

This warranty is given by:

**Brilliant Lighting (Aust) Pty. Ltd.**

**ABN 37 006 203 694**

**956 Stud Road Rowville, VIC 3178**

**Phone: 03 9765 2555**

**Email: [info@brilliantlighting.com.au](mailto:info@brilliantlighting.com.au)**

**[www.brilliantlighting.com.au](http://www.brilliantlighting.com.au)**