



INSTALLATION TRADIE LED CCT TRI WATTAGE BATTEN

Model : 22042/05

CCT : 3000K/4000K/6500K

Wattage: 10W/15W/20W SELECTABLE

Before first using your new Brilliant LED Batten it is most important that you read and follow these instructions, even if you feel you are quite familiar with this type of product. Retain this document for future reference.

THIS FIXTURE MUST BE INSTALLED BY A LICENSED ELECTRICIAN



Specifications:

- Fitting : IP20 Fixed LED luminaire with metal body and PC diffuser.
- Rated Supply Voltage: 220V-240V AC, 50Hz.
- Selectable LED Power: 10W/15W/20W
- CCT LED: 3000K, 4000K, 6500K
- Lamp type: LED.
- Protection Class : Class I.
- Ingress Protection: IP20 (INDOOR USE ONLY – NOT SUITABLE FOR WET AREAS).
- Fixing: Surface mounted. Intended to be used while fastened to a support.
- Dimming: Non Dimmable.

Dimensions:

| Model | Length (mm) | Width (mm) | Height (mm) |
|----------|-------------|------------|-------------|
| 22042/05 | 600 | 72 | 72 |

For Your Safety, please read this instruction manual carefully before installation:

- Installation, repair and/or inspection must be conducted by qualified personnel in accordance with Australian Standards and local Building codes.
- Do not install in a position where the fixture can be easily accessed by children or infirm persons.
- Do not perform modification to the fixture.
- Do not touch the fixture when switched on.
- This fixture is not dimmable.
- Failure to follow these instructions will void the warranty.

Environmental Protection:

This electrical product should not be disposed as normal waste. Please always recycle! Check with your Local Council about your recycle options.





INSTALLATION TRADIE LED CCT TRI WATTAGE BATTEN

Model : 22042/05


CCT : 3000K/4000K/6500K

Wattage: 10W/15W/20W SELECTABLE


Installation Instructions:

1. Ensure mains supply is switched OFF.
2. Unpack the fixture and accessories carefully and place on a flat surface. Dispose of packaging thoughtfully.
3. Remove small safety screw at either end of end caps and press release switch – this will release the diffuser. (FIG 1)
4. With diffuser hanging gently from main body, use fitting as a template, mark and drill mounting holes. Use screws and suitable fixture system to secure the fitting to the mounting surface (E.g. ceiling). (FIG 2)
5. Connect the Live (L), Neutral (N) and Earth according to the markings on the terminal block. (FIG 3)
6. Refit diffuser and secure release switch with screws previously removed. (FIG 4).
7. Return mains power to ON. Switch light on at wall switch.


(FIG 1)

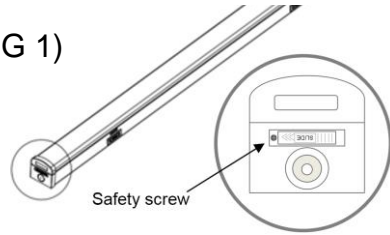


(FIG 2)

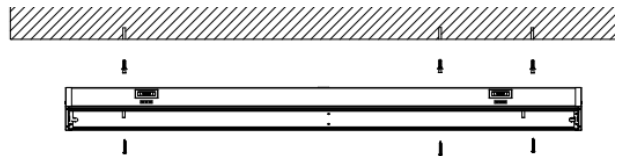

(FIG 3)

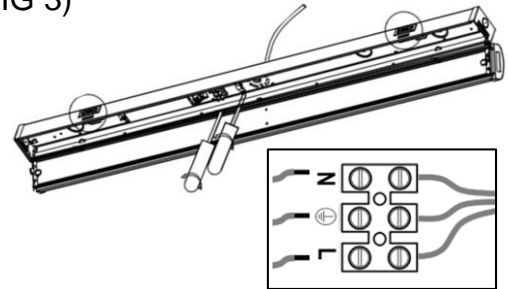

(FIG 4)

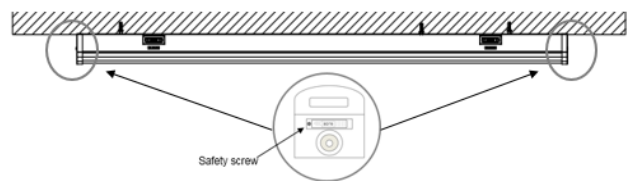


CCT and WATTAGE selection Instructions:

Note: Wattage choice will change the brightness of luminaire.

This product has three choices of colour temperature (CCT) and power output (WATTAGE). Slide switch of either selector to desired CCT or WATTAGE of your choice.

Each combination of Wattage to CCT will create the brightness of the LED to differ slightly.

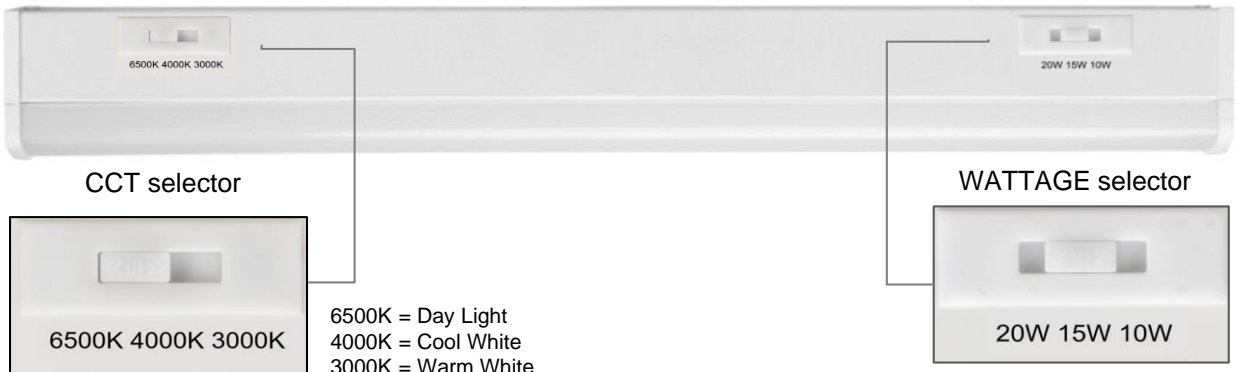



INSTALLATION TRADIE LED CCT TRI WATTAGE BATTEN

Model : 22042/05

CCT : 3000K/4000K/6500K

Wattage: 10W/15W/20W SELECTABLE

Warranty:

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 3 years from date of purchase. This warranty is only valid for products installed and operated within the guidelines specified by Brilliant Lighting, and within the correct operating voltage ranges as stated on the product's rating label.

Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, incorrect installation, service by unqualified or unauthorised personnel or lack of regular maintenance and cleaning. Proof of installation by qualified personnel may be required, e.g. Electrical Safety Certificate. Proof of purchase must be supplied with all warranty claims.

This warranty is provided in addition to any other rights and remedies of the customer under any law. In applications not intended for household, personal or domestic use, liability is limited to replacement or reimbursement of product only. Brilliant Lighting does not warranty the costs of removal or re-installation of this product or associated components.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 3 years from date of purchase of this product. To make a claim under the warranty; at your own expense take the product (with proof of purchase – receipt or similar) to the store where you purchased the product or contact Brilliant Lighting at the address below

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.

ABN 37 006 203 694

956 Stud Road Rowville, VIC 3178

Phone: 03 9765 2555

Email: warranty@brilliantlighting.com.au

www.brilliantlighting.com.au